

## SPECIFICATIONS

INDOOR

### ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- 50,000 hours @ L<sub>70</sub>

### OPTICAL SYSTEM

- White frosted acrylic lens
- Diffuser self-aligns and hinges from either side when maintenance is required
- Available in 30K/35K/40K/50K
- CRI>82

### MOUNTING

- Surface muntig standard
- Can be pendant mounted

### CODE COMPLIANCE

- cETLus Listed for Damp Locations
- BAA Compliant

### WARRANTY

- 5 Year



## CL1-LED LED Cloud Light

### ORDERING INFORMATION


| CATALOG #  | Size/Wattage                | Driver    | Color      |
|------------|-----------------------------|-----------|------------|
| <b>CL1</b> | <u>50.5" L x 11.75" W</u>   | <b>QT</b> | <b>30K</b> |
|            | <b>1-32L</b> (32W, 2600 Lm) |           | <b>35K</b> |
|            | <b>1-48L</b> (48W, 3500 Lm) |           | <b>40K</b> |
|            |                             |           | <b>50K</b> |
|            | <u>26.5" L x 17" W</u>      |           |            |
|            | <b>2-32L</b> (32W, 2600 Lm) |           |            |
|            | <b>2-48L</b> (48W, 3500 Lm) |           |            |
|            | <u>50.5" L x 17" W</u>      |           |            |
|            | <b>3-57L</b> (57W, 4200 Lm) |           |            |
|            | <b>3-72L</b> (72W, 5400 Lm) |           |            |
|            | <u>26.5" L x 26.5" W</u>    |           |            |
|            | <b>4-24L</b> (24W, 1800 Lm) |           |            |
|            | <b>4-36L</b> (36W, 2900 Lm) |           |            |

### OPTIONS (Factory Istalled)


- EM5 - 5W Emergency Battery
- EM10 - 10W Emergency Battery




CL1-1

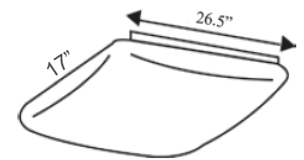

CL1-2

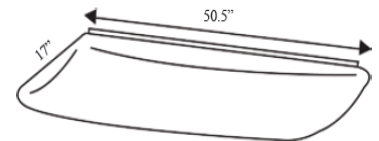

CL1-3



CL1-4