

**SPECIFICATIONS**

**HAZARDOUS**

**HOUSING**

- Copper-free aluminum alloy housing
- Gray painted finish

**ELECTRICAL**

- Quad Tap (QT) - 120-277V
- 347-480V Optional
- Operating Temperature: -40°C (-40°F) - 65°C (149°F)

**OPTICAL SYSTEM**

- IC current controlled LED circuits
- CRI > 70
- 3000K, 4000K, 5000K available
- Also available in Red, Green, Blue, Amber Color Temps

**MOUNTING**

- Multiple mounting options available

**CODE COMPLIANCE**

- UL1598, UL 1598A, UL8750, UL844, UL924 Listed
- cSA Listed
- Class I, Div II, Groups A, B, C, & D
- Class II, Div I & II, Groups E, F, & G
- Class III
- IP66 Rated
- NEMA4X Rated
- Wildlife Friendly (when using AMBER light)

**WARRANTY**

- 5 Year Warranty



**HLLB3-F**  
**LED Hazardous Location**  
**LowBay / Area Light**

MODEL#	Wattage	Driver	Color	Distribution	Mounting
HLLB3-F	30L (4050 Lm)	QT (120-277V)	30K	T1	CM (Ceiling)
	50L (6750 Lm)	480V (277-480V)	40K	T3	TM (Trunion)
	75L (10,125 Lm)		50K	T5	PM (Pendant)
	100L (13,500 Lm)		RD (Red)		WM (Wall)
	120L (16,200 Lm)		GN (Green)		PSM25 (25° Stanchion)
	150L (20,250 Lm)		BL (Blue)		PSM90 (90° Stanchion)
	180L (24,300 Lm)		AM (Amber)		
	200L (27,000 Lm)				
	240L (32,400 Lm)				


**Options (Factory Installed)**

- EM - Battery Backup
- OCS - Occupancy Sensor

**Accessories (Order Separately, Ships on Side)**

- HLLB3-F-WG1 - Wireguard (30-100W)
- HLLB3-F-WG2 - Wireguard (120-240W)
- HLLB3-F-NPT - 3/4" NPT

## DIMENSIONS

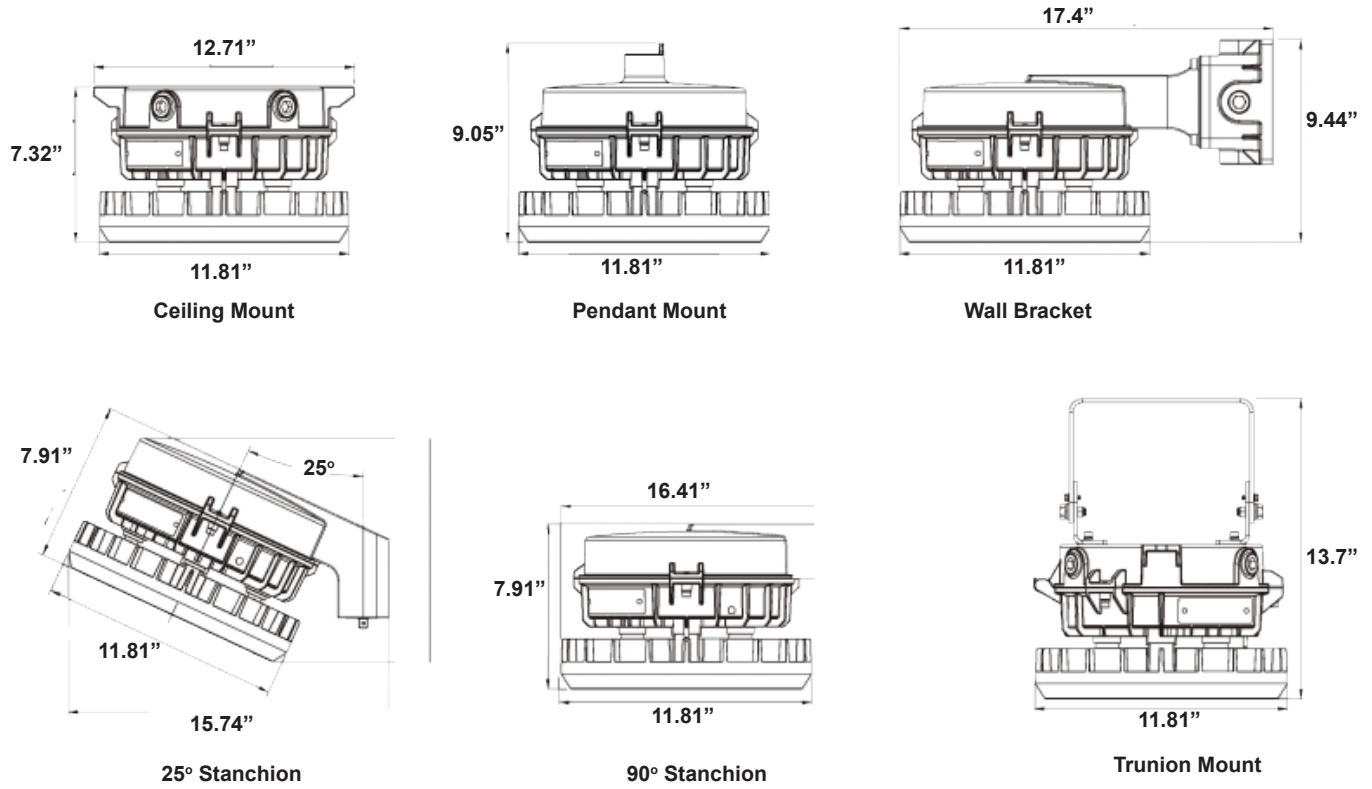

## MOUNTING

