


INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


SAFETY TIPS



Turn fixture off! (Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.)




Next - go to the main fuse box. If your fuse box has an ON/OFF switch, simply place main power switch in OFF position.




Screw-in type fuses - unscrew the fuse or fuses that control the power to the fixture or room you are working in.

1

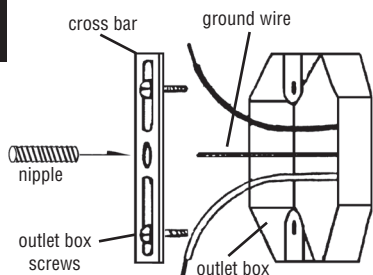


ATTACH cross bar to outlet box with outlet box screws (8-32 x 1/2, 2 slotted screws not provided)

2




CONNECT THE WIRES. NOTE: Attach black fixture wire(s) to black supply wire, white fixture wire(s) to white supply wire and bare or green fixture ground wire(s) to ground wire in outlet box or green ground screw on cross bar. **NOTE:** wire connectors not provided. **NEVER CONNECT GREEN FIXTURE GROUND TO BLACK OR WHITE POWER SUPPLY WIRES.** LED Models may include the LED-MOV1 optional surge suppressor. See wiring diagram below for connections.

LED-MOV1 WIRING DIAGRAM



3




If fixture is to be mounted in a wet location, attach supplied peel-n-stick gasket around the outside edge of the base as shown. Trim off extra material.

POSITION THE FIXTURE over the nipple and secure in place with brass knob.

FOR MODELS PROVIDED WITH LED BULB: Screw bulb(s) into lampholder(s). Use screw bulb/wattage specified on fixture.
FOR LED MODELS: LED array is already mounted.

4

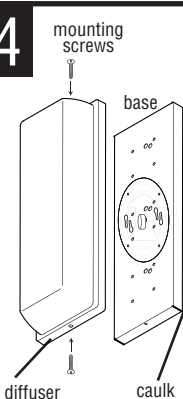

Place diffuser on fixture base and attach to base with mounting screws (8-32x1/2, 4 combination head screw provided). **NOTE:** Wet location mounted fixture **MUST** be caulked with an acrylic caulk at the mounting screw heads and where base of fixture meets mounting surface. This provides a water tight seal when fixture is installed.

CAUTION: Do not turn on without diffuser installed. Do not touch LEDs or circuit board. LED optics could be damaged. No lamp replacement required! Integral LED light engine supplied. Do not remove protective cover from LED light engine.




Clean only with mild soap and water. Avoid spraying with Cleansers, Insecticides, and Pesticides that a petroleum based hydrocarbon products. These will degrade Luminaire.

ISFS11XES

INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


SAFETY TIPS



Turn fixture off! (Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.)




Next - go to the main fuse box. If your fuse box has an ON/OFF switch, simply place main power switch in OFF position.




Screw-in type fuses - unscrew the fuse or fuses that control the power to the fixture or room you are working in.

1

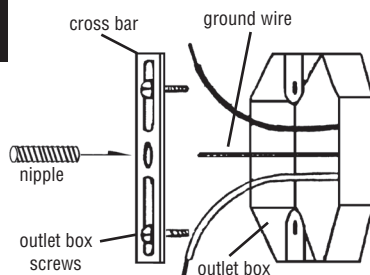


ATTACH cross bar to outlet box with outlet box screws (8-32 x 1/2, 2 slotted screws not provided)

2




CONNECT THE WIRES. NOTE: Attach black fixture wire(s) to black supply wire, white fixture wire(s) to white supply wire and bare or green fixture ground wire(s) to ground wire in outlet box or green ground screw on cross bar. **NOTE:** wire connectors not provided. **NEVER CONNECT GREEN FIXTURE GROUND TO BLACK OR WHITE POWER SUPPLY WIRES.** LED Models may include the LED-MOV1 optional surge suppressor. See wiring diagram below for connections.

LED-MOV1 WIRING DIAGRAM



3




If fixture is to be mounted in a wet location, attach supplied peel-n-stick gasket around the outside edge of the base as shown. Trim off extra material.

POSITION THE FIXTURE over the nipple and secure in place with brass knob.

FOR MODELS PROVIDED WITH LED BULB: Screw bulb(s) into lampholder(s). Use screw bulb/wattage specified on fixture.
FOR LED MODELS: LED array is already mounted.

4

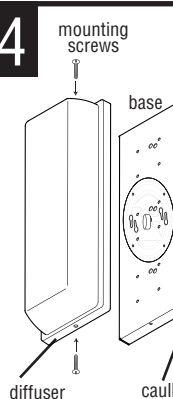

Place diffuser on fixture base and attach to base with mounting screws (8-32x1/2, 4 combination head screw provided). **NOTE:** Wet location mounted fixture **MUST** be caulked with an acrylic caulk at the mounting screw heads and where base of fixture meets mounting surface. This provides a water tight seal when fixture is installed.

CAUTION: Do not turn on without diffuser installed. Do not touch LEDs or circuit board. LED optics could be damaged. No lamp replacement required! Integral LED light engine supplied. Do not remove protective cover from LED light engine.

www.versaledlighting.com
www.eelp.net
(800) 490-4496

VersaLED Lighting
Versatile Lighting Solutions