

SPECIFICATIONS

INDOOR

HOUSING

- Housing is aluminum with steel door
- Corrosion and scratch resistant
- Flush door with clam latches that hinges from either side
- Equipped with earthquake clips
- Easy access plate for quick wiring
- Available in 2x2 and 2x4 size housings

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard
- 347-480V available

OPTICAL SYSTEM


- .100 Frosted prismatic lens standard (multiple lenses available)
- 60,000 hours @ L₇₀
- CRI >80
- Offered in 30K, 35K, 40K, 50K

CODE COMPLIANCE

- cETLus Listed
- Meets UL Requirements
- ARRA Compliant

WARRANTY

- 5 Year

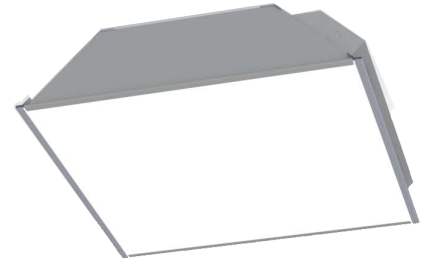

RT4-HL LED Hi-Lumen Recessed Troffer

MODEL#	Size	Lumens	Wattage
RT4-HL-22X80L-QT-*	2X2	11,400	80W
RT4-HL-22X100L-QT-*	2X2	14,250	100W
RT4-HL-22X142L-QT-*	2X2	20,200	142W
RT4-HL-22X168L-QT-*	2X2	26,000	168W
RT4-HL-24X168L-QT-*	2X4	25,000	168W
RT4-HL-24X190L-QT-*	2X4	29,000	190W
RT4-HL-24X238L-QT-*	2X4	36,000	238W
RT4-HL-24X300L-QT-*	2X4	42,750	300W

*Specify Color; 30K, 35K, 40K, 50K

OPTIONS

EM12	- 12W EM Ballast
EM20	- 20W EM Ballast
WG	- Wraparound Wireguard
NL	- No Lens (.100 Standard)
AL125	- AL12 .125 Lens (.100 Standard)
AL156	- AL19 .156 Lens (.100 Standard)
NFL	- No Frame/Lens (.100 Standard)
CL	- Clear .100 Lens (Prismatic Acrylic Standard)
CL125	- Clear .125 Lens (Prismatic Acrylic Standard)
SW	- Smooth White .100 Lens
G3	- Triple Gasketing
WP6	- 6' 3-wire Whip
480V	- 347-480V Driver
MOCS	- Microwave Occupancy Sensor

