

## SPECIFICATIONS

INDOOR

### HOUSING

- Steel Housing
- Easy installation in new construction or retrofit

### ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard

### OPTICAL SYSTEM

- Acrylic Lens
- CRI >80
- Offered in 35K, 40K, 50K

### CODE COMPLIANCE

- cULus Listed for Damp Locations
- RoHS Compliant
- Meets DLC Requirements

### WARRANTY

- 5 Year
- 10 Year Warranty available




## VLWA1-B-LED LED Wraparound

## ORDERING INFORMATION

CATALOG #	Wattage	Lumens	Color
VLWA1-B-40L-QT-35K	40W	4,771	35K
VLWA1-B-40L-QT-40K	40W	5,200	40K
VLWA1-B-40L-QT-50K	40W	5,240	50K


### OPTIONS (Factory Installed)

10YR - Ten Year Warranty

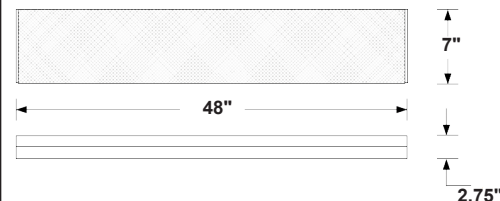

## PHOTOMETRICS

### VLWA1-B-40L-QT-50K

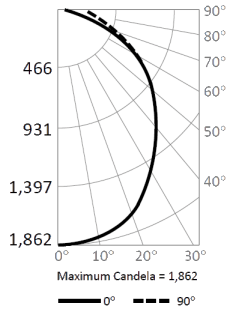

#### Candlepower Summary

	0°	90°
0°	1,862	1,862
10°	1,819	1,820
20°	1,688	1,686
30°	1,483	1,477
40°	1,223	1,226
50°	943	966
60°	660	721
70°	404	504
80°	178	317
90°	3	160

#### Zonal Lumen Summary

Zone	Lumens	% Fixture
0° - 10°	188	3.6%
0° - 20°	720	13.7%
0° - 30°	1,504	28.7%
0° - 40°	2,410	46.0%
0° - 50°	3,308	63.1%
0° - 60°	4,089	78.0%
0° - 70°	4,684	89.4%
0° - 80°	5,064	96.6%
0° - 90°	5,240	100.0%
90° - 180°	0	0%
0° - 180°	5,240	100.0%

#### Cone of Light

