

SPECIFICATIONS

MULTIFAMILY

HOUSING

- Die-Cast Aluminum housing
- 180° Rotatable Light Bars
- Available in black, brushed nickel, or brushed brass finishes
- Two 10' adjustable suspension cables
- Pendant mount

ELECTRICAL

- 120V
- TRIAC Dimmable (Down to 5% with compatible drivers)
- Operating Temperature: -30°C (-22°F) - 40°C (104°F)
- 50,000 hours

OPTICAL SYSTEM


- Polycarbonate lens
- 5CT (Selectable between 27K/30K/35K/40K/50K)
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI_≥90

CODE COMPLIANCE

- UL Listed for Indoor Locations
- IP20 Rated

WARRANTY

- 5 Year

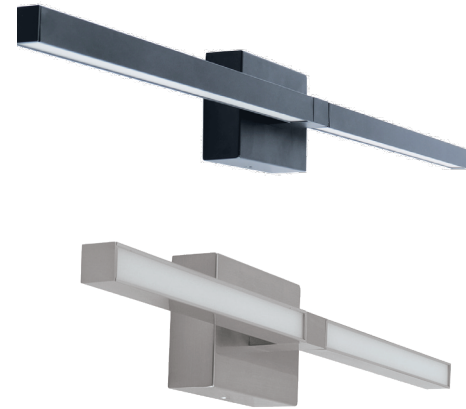

VS40-W-5CT Rotatable Color Selectable LED Vanity


ORDERING INFORMATION

CATALOG #	Description
VS40-W-20L-120V-5CT-*	24", 20W, 1400 Lumens, 27K/30K/35K/40K/50K
VS40-W-30L-120V-5CT-*	36", 30W, 2100 Lumens, 27K/30K/35K/40K/50K
VS40-W-40L-120V-5CT-*	48", 40W, 2800 Lumens, 27K/30K/35K/40K/50K

*Specify Finish: **BLK-Black**, **BRN-Brushed Nickel**, **BRB-Brushed Brass**

OPTIONS (Factory Installed)




EM	- Internal Battery Backup
USB	- Ultrasonic BiLevel Dimming



PHOTOMETRICS




VS40-W-20L-120V-5CT

30W, 4000K, 55'X55' Area, 9' Mounting Height
BUD Rating: B1-U3-G1

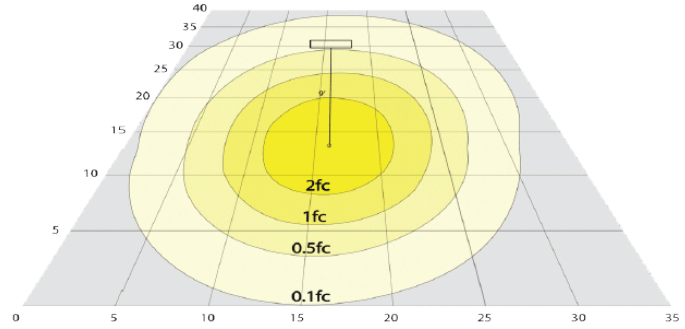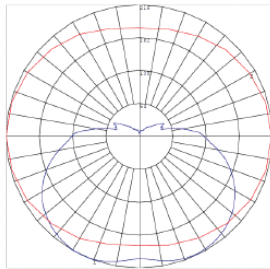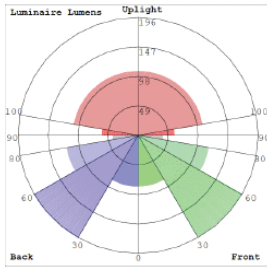

VS40-W-30L-120V-5CT

30W, 4000K, 40'X35' Area, 9' Mounting Height
BUD Rating: B1-U3-G1

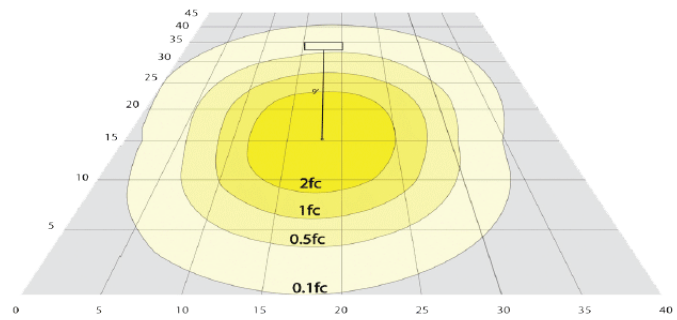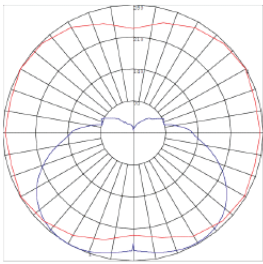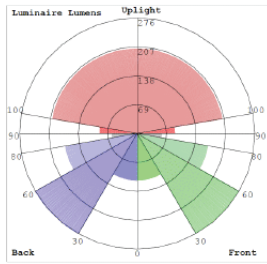

VS40-W-40L-120V-5CT

30W, 4000K, 40'X35' Area, 9' Mounting Height
BUD Rating: B1-U3-G1

