

## SPECIFICATIONS

INDOOR

### HOUSING

- Steel Housing
- Easy installation in new construction or retrofit

### ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V dimmable driver standard
- Operating Temperature: -20°C - 45°C (-4°F - 113°F)
- Power Factor >0.95

### OPTICAL SYSTEM

- PMMA Lens
- CRI >80
- Lumen Range: 2,628 - 6,116 Lm
- CCT Selectable: 35K/40K/50K
- >100,000 @ L<sub>70</sub>

### CODE COMPLIANCE

- cULus Listed for Indoor Locations
- DLC Listed


### WARRANTY

- 5 Year



## WA8-K-MCT

### Wattage and Color Selectable Wrap

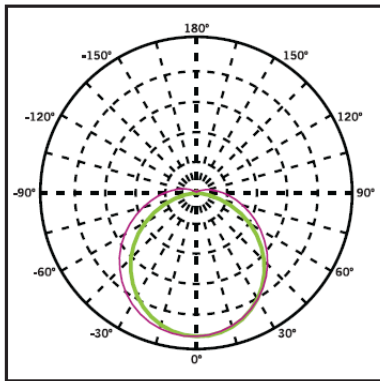

Maximum Candela = 1846.0  
 Located at Horizontal Angle = 0,  
 Vertical Angle 0

## ORDERING INFORMATION

CATALOG #	Wattage	Lumens	CCT
WA8-K-4X1L-MCT	18W /28W /44W	2628 - 6116 Lumens	35K/40K/50K

### OPTIONS (Factory Installed)

MOCS - Microwave Sensor

