

**SPECIFICATIONS**

**MULTI-FAMILY**

**HOUSING**

- Diecast aluminum housing
- Finishes offered in textured gray or textured bronze
- Standard mounting holes and hardware included
- Unit mounts to standard JBox (not included)
- Fixture can be mounted horizontally or vertically

**ELECTRICAL**

- QT (120-277V)
- Operating Temperature down to -20°C (-4°F)

**ILLUMINATION**


- Integrated LED modules
- .100" Thick matte white acrylic diffuser
- 3000K
- 90 CRI

**CODE COMPLIANCE**

- cETLus Listed for Wet Locations
- Meets UL Requirements
- Title24 JA8 Compliant

**WARRANTY**

- 5 Year

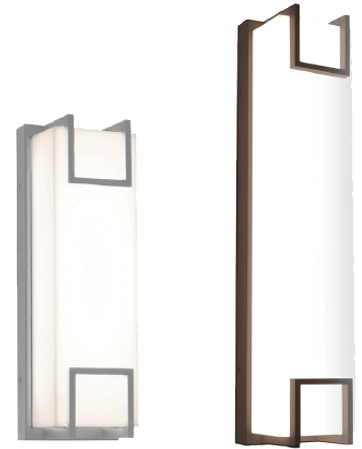

## WSC29 LED Wall Sconce


**ORDERING INFORMATION**

CATALOG #	Description
WSC29-AF-19L-QT-30K-*	19W, 1123 Lumens, 3000K
WSC29-AF-24L-QT-30K-*	24W, 2800 Lumens, 3000K

\*Specify Finish: **GY-Gray, BZ-Bronze**

**OPTIONS**

PC - Photocell

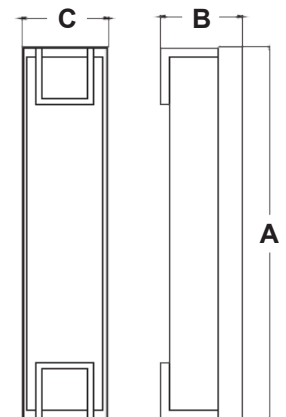

	A	B	C
19W	14 <sup>3/4</sup> "	4 <sup>3/4</sup> "	4 <sup>1/2</sup> "
24W	21"	4 <sup>3/4</sup> "	4 <sup>1/2</sup> "