

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing
- Bronze powdercoat bronze finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- Includes twist lock photocell receptacle

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard
- 347V-480V also available
- Operating Temperature: -40°F (-40°C) - 122°F (50°C)

OPTICAL SYSTEM

- Clear and prismatic glass lenses available
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI > 70
- Offered in 4000K, and 5000K
- Types I, II, III, IV, V available

ILLUMINATION

- 167.3W LED
- 180 System Watts

MOUNTING

- No mounting hardware standard
- Optionally mounts with trunion, slip fitter, or pole arm mount adapter

CODE COMPLIANCE

- CSA Listed for Wet Locations
- Meets UL Requirements
- IP66 Rated
- Meets DLC Requirements
- Assembled in USA available

WARRANTY

- 5 Year
- 10 Year Available


ORDERING INFORMATION

CATALOG #	Lumens	Distribution	Color	Lens
AL24-Q-167L-QT-40K-T1-CL	18,280	Type I	4000K	Flat Clear
AL24-Q-167L-QT-50K-T1-CL	19,976	Type I	5000K	Flat Clear
AL24-Q-167L-QT-40K-T2-CL	17,965	Type II	4000K	Flat Clear
AL24-Q-167L-QT-50K-T2-CL	19,634	Type II	5000K	Flat Clear
AL24-Q-167L-QT-40K-T3-CL	19,292	Type III	4000K	Flat Clear
AL24-Q-167L-QT-50K-T3-CL	21,084	Type III	5000K	Flat Clear
AL24-Q-167L-QT-40K-T4-CL	17,347	Type IV	4000K	Flat Clear
AL24-Q-167L-QT-50K-T4-CL	18,958	Type IV	5000K	Flat Clear
AL24-Q-167L-QT-40K-T5-CL	18,782	Type V	4000K	Flat Clear
AL24-Q-167L-QT-40K-T5-PL	18,219	Type V	4000K	Prismatic Clear
AL24-Q-167L-QT-50K-T5-CL	20,527	Type V	5000K	Flat Clear
AL24-Q-167L-QT-50K-T5-PL	19,911	Type V	5000K	Prismatic Clear

See second page for options/accessories



AL24-Q Small LED Area Light

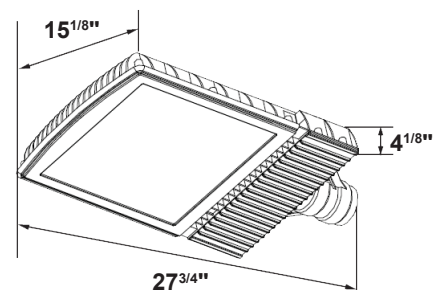


PHOTOMETRICS

OPTIONS (Factory Installed)


SF	- Slipfitter
SB	- Trunion Mount
MAA	- Pole Mounting Arm Adapter (Fits 2 ^{3/8"})
SGP	- Surge Protection
SGF	- Single Fuse
DBF	- Double Fuse
480V	- 347-480V Driver
PC1	- 110-120V Twist Lock Photocell
PC2	- 105-287V Twist Lock Photocell
PCTD1	- 120V Twist Lock Time Delay Photocell
PCTD2	- 277V Twist Lock Time Delay Photocell
TWL7PIN	- 7-Pin Twist Lock Photocell Receptacle
TWLPC3R	- 3-Pin Twist Lock Photocell Receptacle
10YR	- 10 Year Warranty
CC	- Custom Color
USA	- Assembled in USA

ACCESSORIES (Ships on Side)

AL24-Q-HSS	- House Side Shield
AL24-Q-WG	- Wire Guard
TWLNSC	- Twist Lock Non-Shorting Cap (Fixture always off)
TWLSC	- Twist Lock Non-Shorting Cap (Fixture always on)
PTB	- Single Pole Tenon Spoke Bracket
PTB2	- Twin Pole Tenon Spoke Bracket - 90° Arm
PTB2180	- Twin Pole Tenon Spoke Bracket - 180° Arm
PTB3	- Triple Pole Tenon Spoke Bracket - 90° Arm
PTB3120	- Triple Pole Tenon Spoke Bracket - 120° Arm
PTB4	- Quad Pole Tenon Spoke Bracket - 90° Arm
SQTM4	- 4" 180° Twin Square Horizontal Tenon
SQTM5	- 5" 180° Twin Square Horizontal Tenon

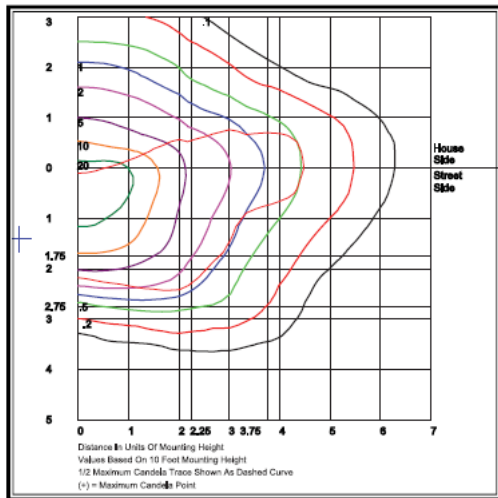

AL24-Q-167L-QT-50K-T3

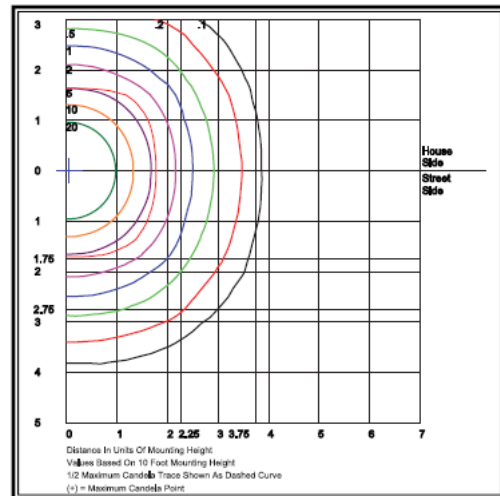

AL24-Q-167L-QT-50K-T5