

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing and front frame
- Bronze powdercoat bronze finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket
- Stainless Steel hardware

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard
- 347V-480V also available
- Operating Temperature: -40°F (-40°C) - 122°F (50°C)

OPTICAL SYSTEM

- Clear and glass lenses available
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 429,000 Hours @ L₇₀
- CRI: 80
- Types V and NEMA 7Hx7V available

ILLUMINATION

- 80.5W LED / 86.6 System Watts

MOUNTING

- No mounting hardware standard
- Optionally mounts with trunion, slip fitter, yoke mount, wall bracket, or mounting arm

CODE COMPLIANCE

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP66 Rated
- Wildlife Lighting Certified (Baffle models only)
- Turtle-Safe (Baffle models only)

WARRANTY

- 5 Year

ORDERING INFORMATION

CATALOG #	Lumens	Distribution	Certification
AL26-Q-81L-QT-AMB	2,607 Lumens	Type V / NEMA 7Hx7V	
AL26-Q-81L-QT-AMB-BAF	2,607 Lumens	Type V / NEMA 7Hx7V	Wildlife Certified

See second page for options/accessories




Shown with ARM mount



Shown with ARM mount and Baffle

AL26-Q-AMB Small Amber Area Light

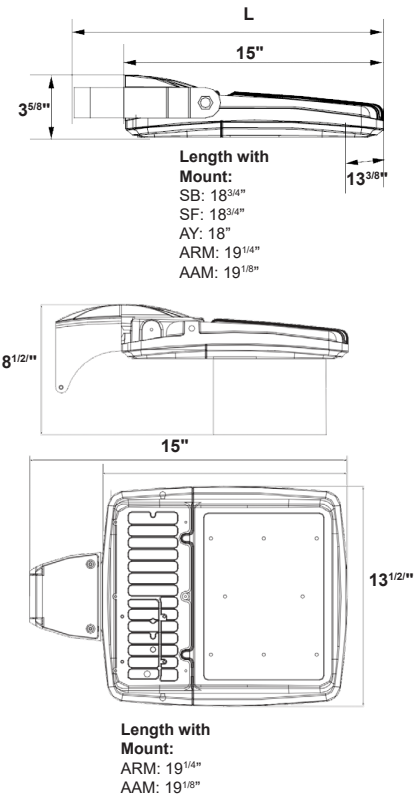

PHOTOMETRICS

OPTIONS (Factory Installed)

ARM	- Mounting Arm
SF	- Slipfitter*
SB	- Trunion Bracket*
AY	- Adjustable Yoke*
MAA	- Mounting Arm Adapter (fits 2 ^{3/8"} arm)
WB	- Wall Mount Bracket
SGP	- Surge Protection
SGF	- Single Fuse
DBF	- Double Fuse
480V	- 347-480V Driver
MS1	- External IR Motion Sensor (20-35')
MS2	- External IR Motion Sensor (18' or less)
OCS	- Internal Sensor with Dimming (25' or less)
TWL7PIN	- 7-Pin Twist Lock Photocell Receptacle
TWLPC3R	- 3-Pin Twist Lock Photocell Receptacle
TWLPC5R	- 5-Pin Twist Lock Photocell Receptacle
10YR	- 10 Year Warranty
CC	- Custom Color

***Non-Baffled Models Only**

ACCESSORIES (Ships on Side)

AL26-Q-GS	- Glare Shield
AL26-Q-WG	- Wire Guard
AL26-RPA	- Round Pole Adapter (use with ARM only, 4-6" poles)
AL26-WMA	- Wall Mount Adapter (use with ARM only)
TWLPC1	- 110-120V Twist Lock Photocell
TWLPC2	- 480V Twist Lock Photocell
TWLTD1	- 120V Twist Lock Time Delay Photocell
TWLTD2	- 277V Twist Lock Time Delay Photocell
TWLNSC	- Twist Lock Non-Shorting Cap (Fixture always off)
TWLSC	- Twist Lock Shorting Cap (Fixture always on)
PTB	- Single Pole Tenon Spoke Bracket
PTB2	- Twin Pole Tenon Spoke Bracket - 90° Arm
PTB2180	- Twin Pole Tenon Spoke Bracket - 180° Arm
PTB3	- Triple Pole Tenon Spoke Bracket - 90° Arm
PTB3120	- Triple Pole Tenon Spoke Bracket - 120° Arm
PTB4	- Quad Pole Tenon Spoke Bracket - 90° Arm