

SPECIFICATIONS

OUTDOOR

HOUSING

- Die Cast aluminum housing
- Anti-UV polyester coating
- Corrosion resistant

ELECTRICAL

- Quad Tap (QT) 120-277VAC
- 480V also available
- 0-10V Dimmable Driver Standard
- Operating Temperature: -4°F - 122°F (-20°C - 50°C)
- 3kV-6.6kV, 5kV-10kV

OPTICAL SYSTEM

- 4000K, 5000K
- Type III standard, also available in Types IV and V
- 75,000 hours @ L₇₀
- CRI ≥ 70

MOUNTING

- Trunion Mount standard
- Slip Fitter and arm mounts also available

CODE COMPLIANCE

- cULus Listed for Wet Locations
- RoHS Compliant
- FCC Compliant
- DLC Premium Listed

WARRANTY

- 5 Year



AL31-S LED Area Light

ORDERING INFORMATION

CATALOG#	Description
AL31-S-1L-QT*-#-T3	100W/150W/200W, 17,000/25,500/34,000 Lms, Type III, Shorting Cap
AL31-S-2L-QT*-#-T3	240W/260W/300W, 40,800/ 44,200/51,000 Lms, Type III, Shorting Cap
<i>*Specify CCT: 40K, 50K</i>	
<i>#Specify Color: BZ (Bronze), WH (White), BK (Black)</i>	

OPTIONS (Factory Installed)


480V*	- 277-480V (replaces QT)
	*Only available with 50K Bronze models
T2	- Type II Distribution (replaces T3)
T4	- Type IV Distribution (replaces T3)
T5	- Type V Distribution (replaces T3)

ACCESSORIES (Order Separately, Ships on Side)

AL31-S-GS	- Glare Shield
AL31-S-SB	- Trunnion Mount
AL31-S-SF	- Slipfitter
AL31-S-PM	- Pole Mount
AL-S-PCSC	- Photocell Sensor Cap
AL-S-MOCS	- 12V DC Microwave BiLevel Daylight Sensor
REM3-S	- Sensor Remote Control
REM6-S	- Sensor Remote Control with LCD Display

DIMENSIONS

1L

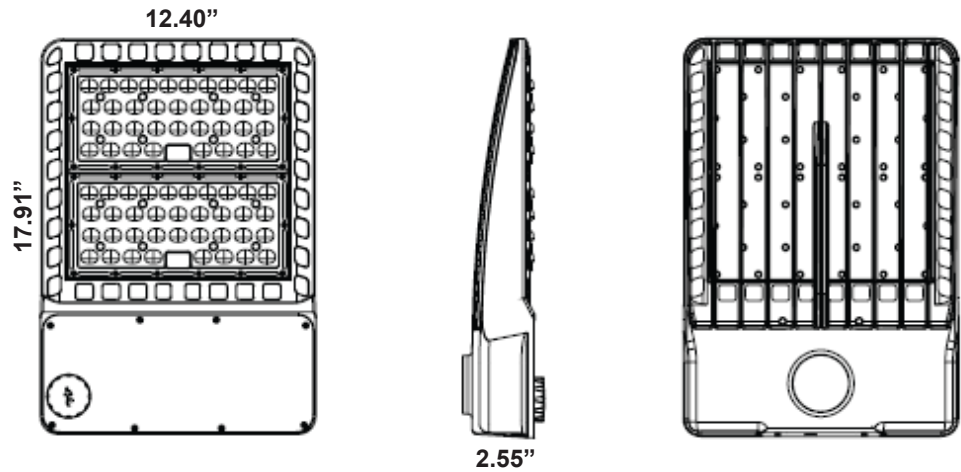

2L

