

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing
- Bronze finish
- Anti-UV polyester coating
- Corrosion resistant
- Pressure escape valve

ELECTRICAL

- Quad Tap (QT) 120-277V
- 0-10V Dimmable driver
- -40°F - 113°F (-40°C - 45°C)
- Power factor >0.9
- Surge Protection 10kV-20kV
- Shorting Cap, Photocell, or Microwave sensor with daylight priority available

OPTICAL SYSTEM

- Type III Distribution Lens standard
- Type II, IV, and V available
- Anti-UV Clear Polycarbonate Lens
- MCT (3000K/4000K/5000K)
- THD < 15%
- 50,000 Hours @ L₇₀
- CRI > 70

MOUNTING

- Slipfit, round/square pole, yoke, and trunnion mounts available

CODE COMPLIANCE

- cULus Listed for Wet Locations
- FCC compliant
- RoHS Compliant
- DLC Premium listed

WARRANTY

- 5 Year

ORDERING INFORMATION

CATALOG#	Wattage	Lumens	Driver	CCT
AL34.5-S-1L-QT-MCT-T3	1L (70W/100W/150W)	10,500/ 15,000/ 22,500 Lms	QT	MCT
AL34.5-S-2L-QT-MCT-T3	2L (200W/240W/300W)	30,000/ 36,000/ 45,000 Lms		
AL34.5-S-3L-QT-MCT-T3	3L (400W/450W/500W)	60,000/ 67,500/ 75,000 Lms		

OPTIONS (Factory Installed)


480V	- 277-480V Driver (replaces QT in part number)
T2	- Type II Distribution Lens (replaces T3 in part number)
T4	- Type IV Distribution Lens (replaces T3 in part number)
T5	- Type V Distribution Lens (replaces T3 in part number)

ACCESSORIES (Order Separately)

AL34-S-SB	- Trunnion Mount
AL34-S-SF	- Slipfitter Mount
AL34-S-PM	- Square or Round Adjustable Pole Mount
AL34-S-YM	- Yoke Mount (2L model)



AL34.5-S LED Area Light

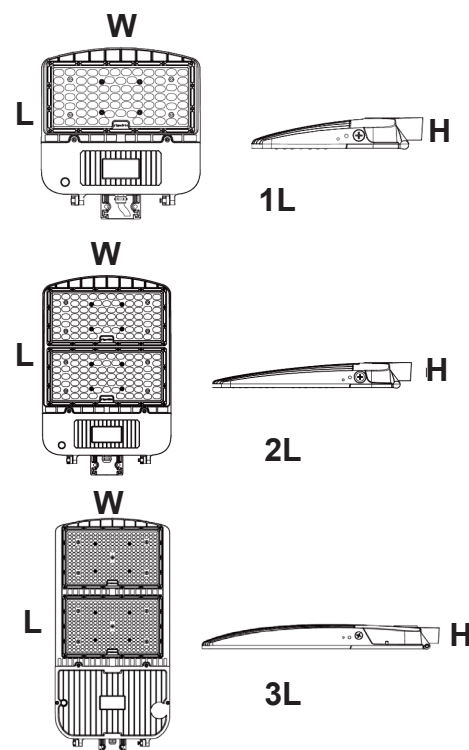

	H (in)	W (in)	L (in)
1L	2.47	12.4	13.31
2L	2.48	12.4	22.9
3L	2.86	13.21	27.33