

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing
- Powdercoat finish
- Stainless steel hardware
- Integral heat sink fins max heat dissipation
- 12" whip included

ELECTRICAL

- QT (120-277V)
- 50/60Hz
- 0-10V Dimmable driver standard
- 277V-480V also available
- Operating Temperature: -40°F (-40°C) - 113°F (45°C)
or -40°F (-40°C) - 104°F (40°C) for 5L model

OPTICAL SYSTEM

- Clear, diffused, and prismatic lenses available
- 40 - 400W
- 100,000 hours at L₇₀
- CRI: 80
- MCT: Selectable between 3000K/4000K/5000K
- Types II, III, IV, V available

MOUNTING

- Pole mount arm for 4"/5" poles
- Slipfitter, trunnion, swivel, adjustable pole mount, and wall bracket available

CODE COMPLIANCE

- Meets UL Requirements
- IP65 Rated
- DLC Premium listed
- Dark Sky approved

WARRANTY

- 5 Year
- 10 Year optional

ORDERING INFORMATION

CATALOG #	Wattage	Driver	CCT	Distribution	Color
AL35-E	1L (40/60/80/100W)	QT	MCT*	T2	Blank (Bronze)
	2L (60/90/120/140W)	480V		T3	BK (Black)
	3L (100/150/200/250W)			T4	SL (Gray Aluminum)
	4L (120/180/240/300W)			T5	WH (White)
	5L (300/320/360/400W)				

*5L model selectable between 4000K/5000K


OPTIONS (Factory Installed)

3000K	- 3000K CCT Lock for 5L model
TWL7PIN	- 7-Pin Twist Lock Photocell Receptacle
TWLPC3R	- 3-Pin Twist Lock Photocell Receptacle
TWLPC3R4	- 3-Pin Twist Lock Photocell Receptacle 347-480VAC
10YR	- 10 Year Warranty

See second page for accessories



AL35-E LED Area Light

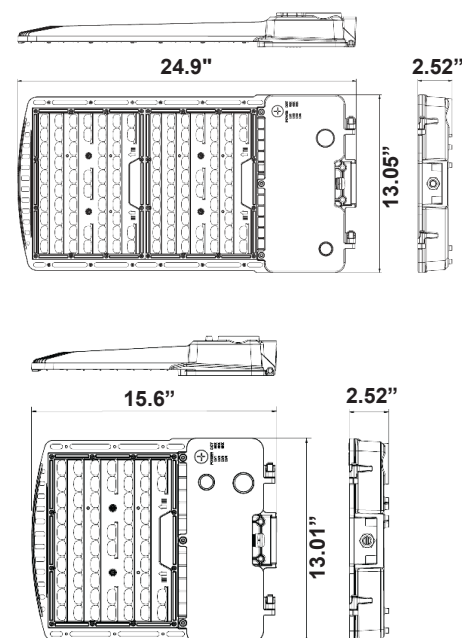


PHOTOMETRICS


ACCESSORIES (Ships on Side)

AL35-E-ARMA-*	- Adjustable Pole Mount Arm -
AL35-E-HSS	- House Side Shield
AL35-E-FGSL	- Full Glare Shield, Large, Bronze (250W, 300W, 400W)
AL35-E-GSL	- Glare Shield, Large, Bronze (250W, 300W, 400W)
AL35-E-FGSS	- Full Glare Shield, Small, Bronze (100W, 140W)
AL35-E-GSS	- Glare Shield, Small, Bronze (100W, 140W)
AL35-E-SF-*	- Slipfitter mount
AL35-E-WM-*	- Wall Mount
AL35-E-SM-*	- Swivel mount
AL35-E-SB-*	- Trunnion mount
OSC-E	- Internal Sensor with Dimming
OSC-E-REM	- Remote for Sensor


*Specify color - **BR** (Bronze), **BK** (Black), **SL** (Gray Aluminum), or **WH** (White)

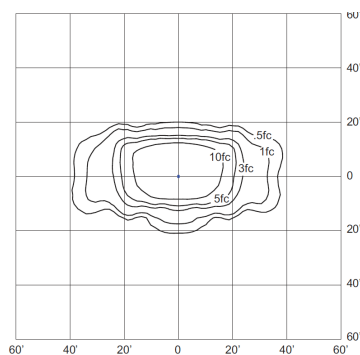


AL35-E-1L-QT-MCT-T2

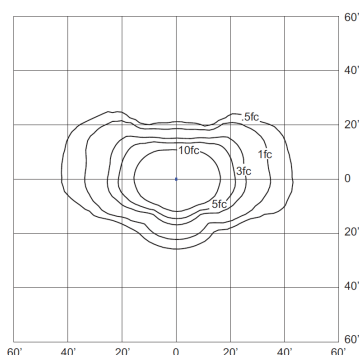

AL35-E-1L-QT-MCT-T3

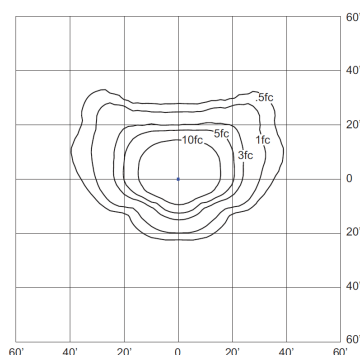

AL35-E-1L-QT-MCT-T4

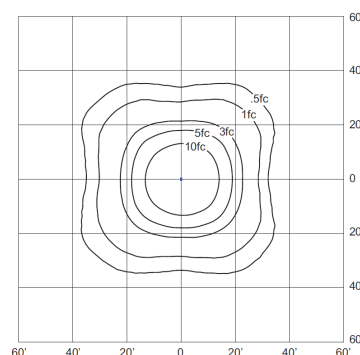

AL35-E-1L-QT-MCT-T5

LUMEN INFORMATION

	Lumens				
	Optics	40W	60W	80W	100W
AL35-E-1L	T2	6,600	9,800	12,700	15,400
	T3	6,600	9,800	12,700	15,400
	T4	6,600	9,800	12,700	15,400
	T5	6,800	10,000	13,000	15,600
AL35-E-2L	Optics	60W	90W	120W	140W
	T2	10,000	14,800	19,600	22,400
	T3	10,000	14,800	19,600	22,400
	T4	10,000	14,800	19,600	22,400
	T5	10,300	15,100	20,000	23,000
AL35-E-3L	Optics	100W	150W	200W	250W
	T2	15,600	22,600	29,600	36,000
	T3	15,600	22,600	29,600	36,000
	T4	15,600	22,600	29,600	36,000
	T5	16,100	23,200	30,200	37,000
AL35-E-4L	Optics	120W	180W	240W	300W
	T2	19,600	27,900	36,000	43,800
	T3	19,600	27,900	36,000	43,800
	T4	19,600	27,900	36,000	43,800
	T5	20,300	29,000	37,000	44,700
AL35-E-5L	Optics	300W	325W	360W	400W
	T2	48,900	49,900	56,200	60,800
	T3	48,900	49,900	56,200	60,800
	T4	48,600	50,900	55,400	60,400
	T5	50,100	52,200	57,600	62,400

*shown at 4000K