

SPECIFICATIONS

MULTIFAMILY

HOUSING

- Galvanized steel mounting frame
- Housing adjusts for ceilings up to 1^{1/4"} thick

ELECTRICAL

- Quad Tap (120-277V)
- Dimming capability with approved drivers

ILLUMINATION

- CRI: 80 or 90

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- Meets UL Requirements
- Energy Star Rated
- California Title24
- BAA Compliant

WARRANTY

- 5 Year



ARCFK6 6" Frame in Kit

ORDERING INFORMATION

MODEL#	Wattage	Driver	CCT	CRI	Reflector	Baffle (TM2/TM3)
ARCFK6-TM1	14L (950 Lumens)	QTT (10-100% Triac Dim)*	27K	80C	WH - White	WH - White
ARCFK6-TM2	23L (1790 Lumens)	QTD (0-10V Triac & ELV Dim)	30K	90C	OP - Opal	BK - Black
ARCFK6-TM3	30L (2235 Lumens)	<i>*not available in 45W</i>	35K			
ARCFK6-TM4	45L (3220 Lumens)		40K			
ARCFK6-TM5						
ARCFK6-TM6						
ARCFK6-TM7						

OPTIONS



EM - Emergency Battery


Optional Metal Trim Ring Finish

OWP	- White Plastic Trim Ring (standard)
OWM	- White Metal Ring
OSN	- Satin Nickel
OCH	- Chrome
OSF	- Polished Self Flange (for open or wall wash only)

Ordering Example

ARCFK6-TM2-23L-QTD-40K-80-WH-WH

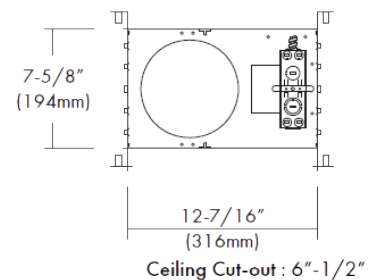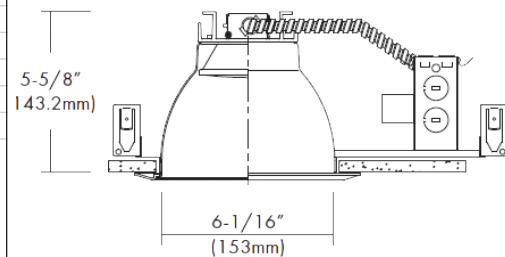



TRM1

TRM2

TRM3



TRM4

TRM5

TRM6



TRM7