

SPECIFICATIONS

INDOOR

HOUSING

- Compatible with most 4" housings measuring at least 4^{7/8}" high with an inside diameter between 4^{1/2}" - 5"
- Supplied with flex conduit for connection to existing junction boxes
- Painted, extruded aluminum heat sink
- Heavy gauge aluminum reflectors available in various styles and finishes (2nd page)

ELECTRICAL

- Quad Tap (120-277V)
- Dimming capability with approved drivers

ILLUMINATION

- CRI: 80 or 90

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- Meets UL Requirements
- Energy Star Rated
- California Title24
- BAA Compliant

WARRANTY

- 5 Year



ARCRK4 4" Retro-Fit Kit

ORDERING INFORMATION

MODEL#	Wattage	Driver	CCT	CRI	Reflector	Baffle (TRM2/TRM3)
ARCRK4-TRM1	14L (950 Lumens)	QTT (10-100% Triac Dim)*	27K	80C	WH - White	WH - White
ARCRK4-TRM2	23L (1740 Lumens)	QTD (0-10V Triac & ELV Dim)	30K	90C	OP - Opal	BK - Black
ARCRK4-TRM3			35K			
ARCRK4-TRM4			40K			
ARCRK4-TRM5						
ARCRK4-TRM6						
ARCRK4-TRM7						

OPTIONS


- EM - Emergency Battery
- SCA - Sloped Ceiling Adapter

Optional Metal Trim Ring Finish



- OWP - White Plastic Trim Ring (standard)
- OWM - White Metal Ring
- OSN - Satin Nickel
- OCH - Chrome
- OSF - Polished Self Flange (for open or wall wash only)

Ordering Example

ARCRK4-TRM2-23L-QTD-40K-80C-WH-WH

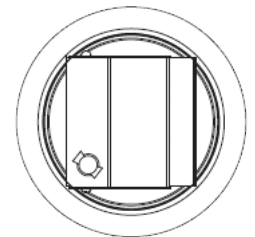


6 1/4"

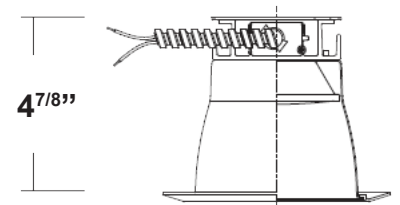

4 7/8"

4 3/8"

Ceiling Cut-Out: 5"

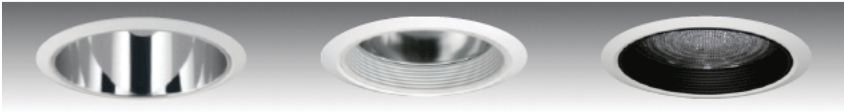

TRM1
Specular Open Reflector

TRM2
Baffle w/ Reflector


TRM3
Baffle w/ Regressed Lens



TRM4
Reflector w/ Regressed Lens

TRM5
Wall Wash w/ Reflector Plate

TRM6
Reflector w/ Frosted Floating Lens

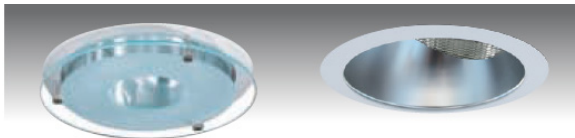

TRM7
Reflector w/ Frosted 3.5" Center Hole Lens