

SPECIFICATIONS

OUTDOOR

HOUSING

- Aluminum round housing
- Powder coat finish offered in black or bronze housing
- Available in flat or dome top

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 347-480V also available
- 50/60Hz
- 0-10V Dimmable standard
- Power Factor: >.9
- Operating Temperature: -4°F (-20°C) - 122°F (50°C)

ILLUMINATION

- Cone, Louver and Frosted Lenses
- Wattage Selectable (12/16/22W)
- 1560 / 2080 / 2860 Lumens
- Color Selectable: 5CT (27K/30K/35K/40K/50K)
- 50,000 hours @ L₇₀
- CRI≥80

MOUNTING


- Mounts with 7^{1/2}" anchor bolts, included

CODE COMPLIANCE

- cULus Rated for Wet Locations
- DLC Listed
- CA T24 Listed
- FCC approved

WARRANTY

- 5 Year Warranty

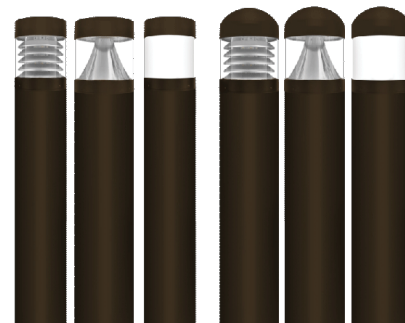

BRL-EN LED Bollard

ORDERING INFORMATION

MODEL#	Top	Optics	Wattage	Driver	Color	Color
BRL-EN	D (Dome)	CL (Louvers)	1L	QT	5CT	BK (Black)
	F (Flat)	AR (Reflector)		480V		BZ (Bronze)
		FL (Frosted)				

OPTIONS (Factory Installed)

CL22	- Cut from 44" Down to 22" Height
OCS	- Bi-Level Occupancy Sensor with Daylight Harvesting
PC	- Photocell
EM	- Integral Emergency Battery
CC	- Custom Color

ACCESSORIES (Order Separately)

BRL-EN-HSS	- 180° Shield
------------	---------------

DIMENSIONS

