

SPECIFICATIONS

OUTDOOR

HOUSING

- Extruded aluminum housing with dome top
- Available in bronze or black
- Flush mounting base
- Vandal resistant screws

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 347V also available
- 0-10V Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 40°C (104°F)
- 147,000 hours @ L₇₀

OPTICAL SYSTEM

- Clear polycarbonate lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI: 80
- 3000K, 4000K, and 5000K available

MOUNTING

- Mounts with 8" anchor bolts, included

CODE COMPLIANCE

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP65 Rated
- BAA Compliant

WARRANTY

- 5 Year



BRL-Q-D Round Dome LED Bollard

ORDERING INFORMATION

CATALOG #	Optics	Wattage	Driver	CCT	Color
BRL-Q-D	AR (Reflector)	10L	QT	30K	BZ (Bronze)
	CL (Louvers)	15L	347V (15W only)	40K	BK (Black)
	GL (Glass)	22L		50K	CC (Custom)

OPTIONS (Factory Installed)


EM	- Emergency Battery (QT models only)
EMCW	- Cold Weather Emergency Battery (QT models only) -20°C
OCS	- Microwave Sensor with Dimming & Remote Programming
T3	- Type III Distribution (Type V standard, not available with CL optics)
CL30	- Cut down to 30" (from 42")
CL36	- Cut down to 36" (from 42")
SGP	- Surge Protection
SGF	- Single Fuse (QT models only)
DBF	- Double Fuse (QT models only)
GF1	- 15A GFCI Outlet, 120V
GSBK	- Black Glare Shield - 180°
GSBZ	- Bronze Glare Shield - 180°



OCS



GFI

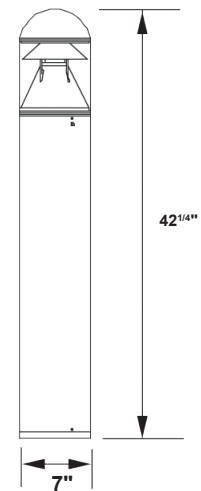

ACCESSORIES (Ships on Side)

- REM-Q - Remote for OCS

