

SPECIFICATIONS

OUTDOOR

HOUSING

- Extruded aluminum housing with flat top
- Available in bronze or black
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 347V also available
- Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 40°C (104°F)

OPTICAL SYSTEM

- Clear polycarbonate lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 147,000 hours @ L₇₀
- CRI: 80
- 3000K, 4000K, and 5000K available

ILLUMINATION

- 14.5W / 17 System Watts

MOUNTING

- Mounts with 8" anchor bolts, included

ORDERING INFORMATION

CATALOG #	LUMENS	OPTICS	COLOR
BRL-Q-F-R3-15L-QT-30K	1,020	T3 Glass	3000K
BRL-Q-F-R3-15L-QT-40K	1,106	T3 Glass	4000K
BRL-Q-F-R3-15L-QT-50K	1,152	T3 Glass	5000K
BRL-Q-F-R5-15L-QT-30K	905	T5 Glass	3000K
BRL-Q-F-R5-15L-QT-40K	1,080	T5 Glass	4000K
BRL-Q-F-R5-15L-QT-50K	1,125	T5 Glass	5000K
BRL-Q-F-AR-15L-QT-30K	1,225	Reflector	3000K
BRL-Q-F-AR-15L-QT-40K	1,458	Reflector	4000K
BRL-Q-F-AR-15L-QT-50K	1,519	Reflector	5000K
BRL-Q-F-CL-15L-QT-30K	689	Louvers	3000K
BRL-Q-F-CL-15L-QT-40K	747	Louvers	4000K
BRL-Q-F-CL-15L-QT-50K	778	Louvers	5000K

OPTIONS (Factory Installed)

BLK	-	Black Housing (bronze standard)
EBLED	-	Integral Emergency Ballast
CL*	-	Custom Length (*Specify in inches)
347V	-	347V Driver
SGP	-	Surge Protection
SGF	-	Single Fuse
DBF	-	Double Fuse
GF1	-	15A GFCI Outlet, 120V
GSBL	-	Black Glare Shield - 180°
GSBR	-	Bronze Glare Shield - 180°
10YR	-	10 Year Warranty
CC	-	Custom Color
USA	-	Assembled in USA

ACCESSORIES (Ships on Side)

ABK4	-	4" Anchor Bolt Kit (8" provided standard)
ABK12	-	12" Anchor Bolt Kit (8" provided standard)
ABK15	-	15" Anchor Bolt Kit (8" provided standard)
BOLRMK	-	Root Mount Kit

CODE COMPLIANCE


- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP65 Rated
- Assembled in America available

WARRANTY


- 5 Year
- 10 Year Available




**BRL-Q-F
Round Flat
LED Bollard**

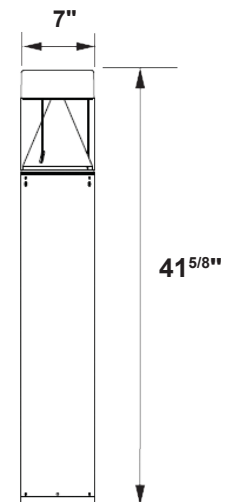


PHOTOMETRICS

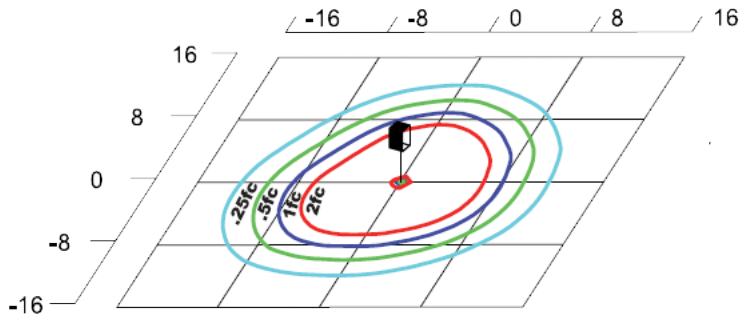

BRL-Q-F-R3-15L-QT-50K
Mounting Height = 3.5ft

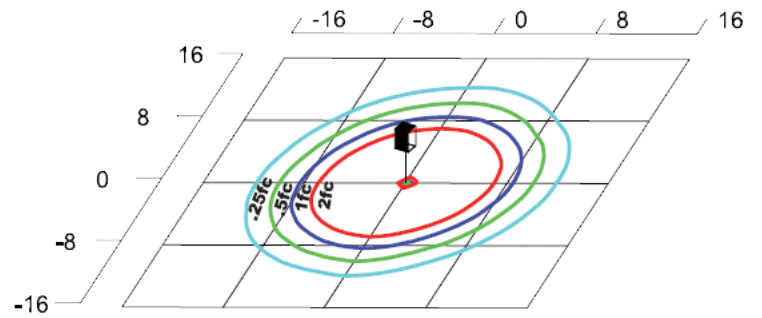

BRL-Q-F-R5-15L-QT-50K
Mounting Height = 3.5ft

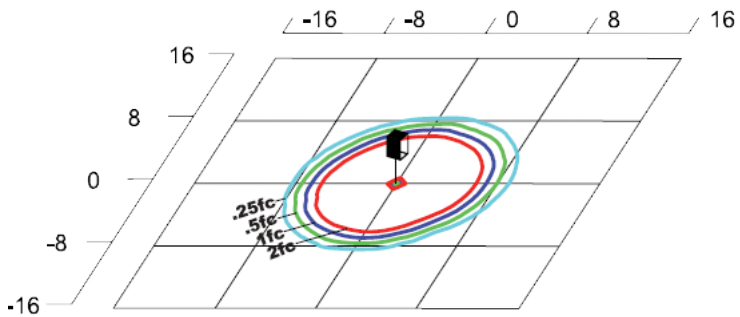

BRL-Q-F-AR-15L-QT-50K
Mounting Height = 3.5ft