

**SPECIFICATIONS**

**OUTDOOR**

**HOUSING**

- Decorative extruded aluminum round housing
- Available in bronze or black
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket

**ELECTRICAL**

- Quad Tap (QT) - 120/208/240/277V
- 347V also available
- Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 40°C (104°F)
- 187,000 hours @ L<sub>70</sub>

**OPTICAL SYSTEM**

- Clear polycarbonate lens or diffused lens available
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- CRI: 80
- 4000K and 5000K available

**ILLUMINATION**

- 16.6W / 20.2 System Watts

**MOUNTING**

- Mounts with 8" anchor bolts, included

**CODE COMPLIANCE**

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP66 Rated
- Assembled in USA Available

**WARRANTY**

- 5 Year
- 10 Year Available

**ORDERING INFORMATION**

CATALOG #	LUMENS	OPTICS	COLOR	LENS
BRLD-Q-16L-QT-40K-CL	1,539	Type V	4000K	Clear
BRLD-Q-16L-QT-40K-DL	1,462	Type V	4000K	Diffused
BRLD-Q-16L-QT-50K-CL	1,603	Type V	5000K	Clear
BRLD-Q-16L-QT-50K-DL	1,523	Type V	5000K	Diffused

**OPTIONS (Factory Installed)**


BLK	-	Black Housing (bronze standard)
CL*	-	Custom Length (*Specify in inches)
347V	-	347V Driver
SGP	-	Surge Protection
SGF	-	Single Fuse
DBF	-	Double Fuse
GF1	-	15A GFCI Outlet, 120V
10YR	-	10 Year Warranty
CC	-	Custom Color
USA	-	Assembled in America

**ACCESSORIES (Ships on Side)**


ABK4	-	4" Anchor Bolt Kit (8" provided standard)
ABK12	-	12" Anchor Bolt Kit (8" provided standard)
ABK15	-	15" Anchor Bolt Kit (8" provided standard)



**BRLD-Q**  
**Decorative Round**  
**LED Bollard**

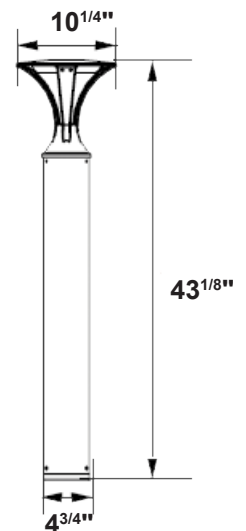

## PHOTOMETRICS

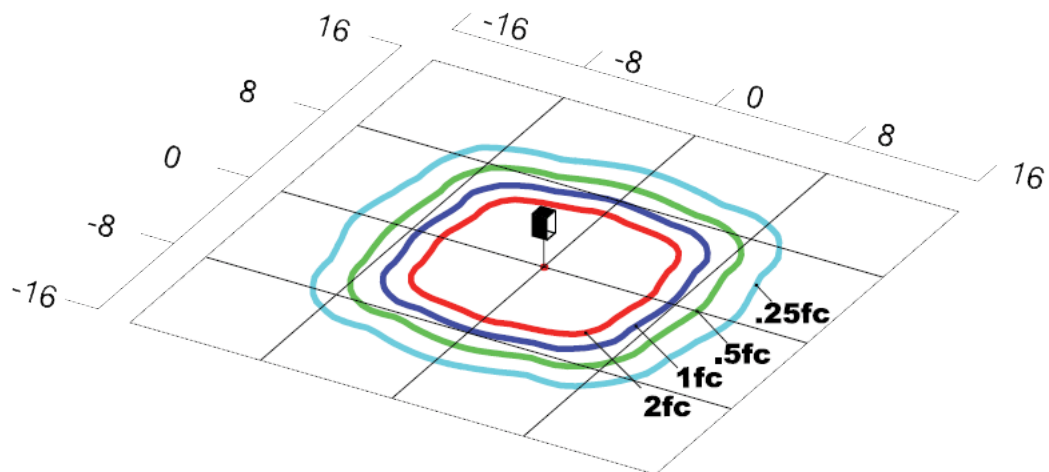

**BRLD-Q-16L-QT-50K-CL**  
Mounting Height = 3.5ft