

SPECIFICATIONS

INDOOR

HOUSING

- Aluminum housing with a satin coating
- Easy installation into existing 2x2 or 2x4 fluorescent recessed housings

ELECTRICAL

- QT (120-277V)
- 50/60hz
- 0-10V Dimmable driver standard
- Operating Temperature: -20°C (-4°F) - 40°C (104°F)
- Power Factor >.90

OPTICAL SYSTEM

- Polycarbonate lens
- High quality heat sinks for temperature control
- 50,000 hours @ L₇₀
- CRI: 80
- THD < 20%
- MCT (selectable: 35K/40K/50K)

MOUNTING

- Supplied with self-tapping screws. Includes side and end T-bar frame plates.

CODE COMPLIANCE

- UL Listed for Damp Locations
- RoHS Compliant
- FCC Compliant
- DLC Premium Listed

WARRANTY

- 5 Year



CBRK-S LED Selectable Center Basket Retrofit

ORDERING INFORMATION

CATALOG #	Size	Wattage	Lumens	Color
CBRK-S-22X1L-QT-MCT	2X2	20W / 25W / 30W	2800 / 3250 / 3900 Lm	35/40/50K
CBRK-S-24X1L-QT-MCT	2X4	34W / 38W / 45W	4420 / 4940 / 5850 Lm	35/40/50K


Options (factory installed)

EM8	- 8W Emergency Battery (90 Min)
EM20	- 20W Emergency Battery (90 Min)
OCS	- Smart Sensor for PC with BiLevel Motion Dimmer


Accessories (order separately, ships on side)

OCS-S-REM	- Remote Control to Program Sensor
-----------	------------------------------------

11.33lbs

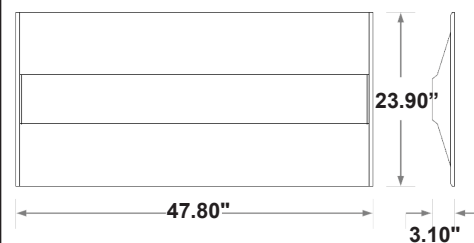

7.21lbs



ELECTRICAL INFORMATION

Catalog #	Input Amps (A)	
	120V	277V
CBRK-S-22 (20W)	0.18	0.08
CBRK-S-22 (25W)	0.28	0.10
CBRK-S-22 (30W)	0.33	0.12
CBRK-S-24 (34W)	0.31	0.14
CBRK-S-24 (38W)	0.35	0.15
CBRK-S-24 (45W)	0.41	0.18