

SPECIFICATIONS

INDOOR

HOUSING

- Die-cast heavy gauge steel
- Baked white enamel or polyester powder coating

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable driver standard
- Power factor > .90
- THD < 20%
- 4kV Surge Protection
- 50,000 hours @ L₇₀

OPTICAL SYSTEM

- White frosted acrylic lens
- Diffuser self-aligns and hinges from either side when maintenance is required
- Available in 30K/35K/40K/50K
- CRI>80

MOUNTING

- Surface mounting standard
- Can be pendant mounted

CODE COMPLIANCE

- cULus Listed for Damp Locations
- BAA Compliant
- FCC Compliant
- RoHS Compliant

WARRANTY

- 5 Year

ORDERING INFORMATION


CATALOG #	Size/Wattage	Driver	Color
CL1-K	51.5" L x 11.5" W	QT	30K
	14X17L (17W, 3220 Lm)		35K
	14X24L (24W, 4480 Lm)		40K
	14X30L (30W, 5705 Lm)		50K
	14X37L (37W, 6910 Lm)		
	14X48L (48W, 8640 Lm)		
	14X70L (70W, 11,797 Lm)		
	27.5" L x 27" W		
	22X17L (17W, 3166 Lm)		
	22X24L (24W, 4350 Lm)		
	22X31L (31W, 5470 Lm)		
	22X39L (39W, 6452 Lm)		
	51.5" L x 27" W		
	24X17L (17W, 3220 Lm)		
	24X24L (24W, 4480 Lm)		
	24X30L (30W, 5705 Lm)		
	24X37L (37W, 6910 Lm)		
	24X48L (48W, 8640 Lm)		
	24X70L (70W, 11,797 Lm)		

OPTIONS (Factory Installed)


EM5	- 5W Emergency Battery
EM10	- 10W Emergency Battery
EM14	- 14W Emergency Battery
SQL	- Square Lens (Puff Lens Standard)




CL1-K-LED LED High Lumen Cloud Light

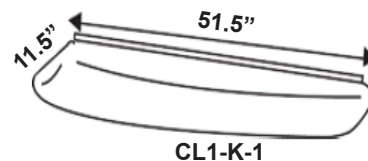

CL1-K-1



CL1-K-4

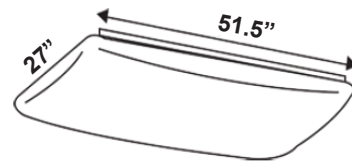

CL1-K-5