

SPECIFICATIONS

INDOOR

FEATURES

- The DL series is the standard in loading dock light arms
- Dual strut gives the arm the strength to survive the busiest warehouses
- The dual strut design will also support a fan or light/fan combo
- Constructed of 14 gauge square steel tubing
- Lamp Cover included

HEAD STYLES

- See second page for details

ELECTRICAL

- Arm Plug: NEMA 5-15P
- Arm Socket: IEC C-14
- Head Plug: IEC C-13
- AC Voltage: 115V

CODE COMPLIANCE

- cULus Listed
- Assembled in USA

WARRANTY

- 5 Year




DL Double Strut Arm and Dock Light

ORDERING INFORMATION


MODEL	Arm Length	Head	Options
DL	24"	HDLED	FAN (up to 60")
	40"	PLED	
	60"	PL1	
	90"	ML1	
	114"	P	
		HPS-P	
		HPS-P-FS	

ACCESSORIES (Order Separately, Ship on Side)


DL-ARM*	- Arm Only (*specify length in inches)
TL-HDLED	- HDLED Head Only
TL-PLED	- PLED Head Only
TL-PL1	- PL1 Head Only
TL-ML1	- ML1 Head Only
TL-P	- P Head Only
TL-HPS-P	- HPS-P Head Only
TL-HPS-P-FS	- HPS-P-FS Head Only
TL-TRIPOD	- Adjustable Tripod
TL-MB	- Heavy Duty Mounting Bracket (recommended for 90"+)

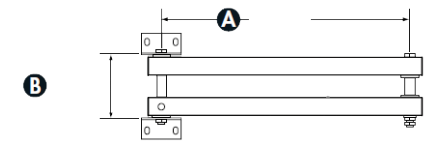

Model	A	B
DL24	24.0"	5"

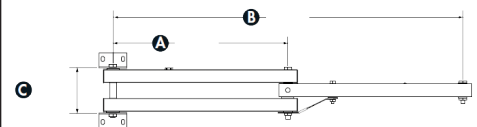

Model	A	B	C
DL40	19.5"	41"	5"
DL60	29.5"	59"	5"



Model	A	B	C	D
DL90	29.5"	59"	88.5"	8.5"
DL114	29.5"	59"	88.5"	8.5"

HEAD STYLES

HDLED: Heavy Duty Cast Aluminium LED Module Head

- 915 Lumens
- Uses 17.5W
- 60,000+ lamp life
- IP66 Rated; dust tight, wet and damp location
- Shatterproof polycarbonate lens cover
- Ideal for food service applications
- Units available for 120V, 240V, and low voltage applications

ML1: Metal LED Module Head

- 679 Lumens
- Uses 14W
- Units available for 120V, and low voltage applications

PL1: Polycarbonate LED Module Head

- 903 Lumens
- Uses 15.5W
- Ideal for refrigerated and food service applications
- Units available for 120V, 240V, and low voltage applications

PLED: Polycarbonate LED PAR38 Bulb Head

- 850 Lumens
- Ideal for refrigerated and food service applications
- Wire Guard included
- Units available for 120V, 240V, and low voltage applications

P: Polycarbonate Incandescent PAR38 Bulb Head

- Lamp not included
- Ideal for refrigerated and food service applications
- Wire guard included
- Can handle incandescent, or halogen bulb (up to 150W)
- Units available for 120V, 240V, and low voltage applications

M: Metal Incandescent PAR38 Bulb Head

- Lamp not included
- Wire guard included
- Can handle incandescent, or halogen bulb (up to 300W)
- Units available for 120V, and low voltage applications

HPS-P: Polycarbonate High Pressure Sodium Bulb Head

- 50W HPS Lamp included
- 4,000 Lumens
- Units available for 120V, 277V, and low voltage applications

HPS-P-FS: Polycarbonate High Pressure Sodium Bulb Head - Food Service

- 50W HPS Lamp included
- 4,000 Lumens
- Clear polycarbonate lens with diffuser for food service
- Units available for 120V, 277V, and low voltage applications

TL-TRIPOD: Adjustable Tripod

- Height Adjusts from 40-72"
- Legs open to 42" diameter for stability
- Folded height is 40"
- Can be used with all lamp heads

FAN

- High capacity 3-speed fan
- 18" fan rated for 3000cfm