

SPECIFICATIONS

MULTIFAMILY

HOUSING

- Aluminum Housing
- White Finish
- (3) 10' Adjustable suspension cables

ELECTRICAL

- 120-277V
- 0-10V Dimmable
- Operating Temperature: -46°F - 104°F (-43°F - 40°F)

ILLUMINATION

- Polycarbonate Lens
- MCT Selectable: 3000K, 3500K, 4000K
- 5116 Lumens
- 50,000 hours @ L₇₀
- CRI ≥ 80
- Beam Angle: 114°
- Optional Uplight features diverts 20% of existing light and casts it upward

MOUNTING

- Suspension mount standard, direct mount optional

CODE COMPLIANCE

- UL Listed for Damp Locations
- Energy Star Listed


WARRANTY

- 5 Year



FCMP23

Flush or Suspended Mount Selectable LED Light

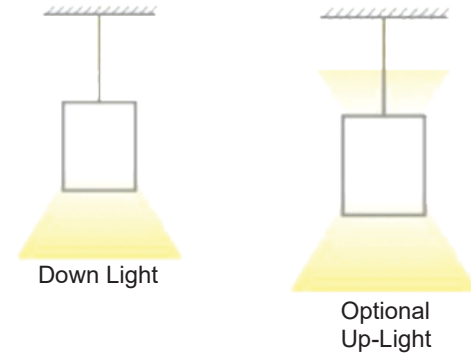

ORDERING INFORMATION

CATALOG #	Wattage	Lumens	Color
FCMP23-W-P-1L-QT-MCT	30W/40W/50W	5116 Lumens	30K/35K/40K

OPTIONS (Factory Installed)

EM	- Internal Battery
UPL	- Uplight; Diverts 20% of Light to Up (120V only)
BLD	- Microwave Bi-Level Dimming

ACCESSORIES (Ships on Side)

FCMP23-SMK	- Surface Mount Kit
------------	---------------------

