

## SPECIFICATIONS

OUTDOOR

### HOUSING

- Heavy duty die cast aluminum housing
- Black finish
- 1.67' Whip length

### ELECTRICAL

- Quad Tap (QT) - 120-277V
- 50/60Hz
- 0-10V Dimming
- Operating Temperature: -40°F (-40°C) - 130°F (54°C)
- Power factor >.99

### OPTICAL SYSTEM

- Glass lens
- 100,000 Hours @ L<sub>70</sub>
- CRI<sub>≥</sub>80
- Available in 5700K

### MOUNTING

- Provided standard with yoke mount

### CODE COMPLIANCE

- UL Listed for Wet Locations
- IP65 Rated
- FCC Compliant
- RoHS Compliant
- Meets DLC Requirements

### WARRANTY


- 5 Year

## ORDERING INFORMATION


| MODEL # | Wattage     | Driver | CCT | Mount           |
|---------|-------------|--------|-----|-----------------|
| FL21-CL | 40L (40W)   | QT     | 30K | AY (Yoke Mount) |
|         | 60L (60W)   |        | 40K |                 |
|         | 90L (90W)   |        | 50K |                 |
|         | 120L (120W) |        |     |                 |
|         | 150L (150W) |        |     |                 |

### OPTIONS (Factory Installed)

|      |                                                                      |
|------|----------------------------------------------------------------------|
| WH   | - White Housing (Bronze standard)                                    |
| EM8  | - 8W Emergency Battery                                               |
| 480V | - 480V Driver (Replaces QT in part number)                           |
| OCS  | - Motion Sensor with Step-Down Capability and Dusk to Dawn Photocell |
| PC   | - Photocell                                                          |

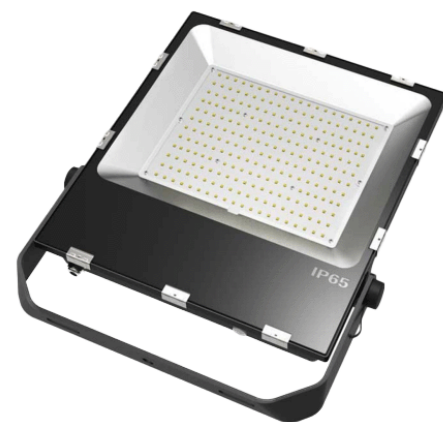

**FL21-CL**  
**LED Flood Light**

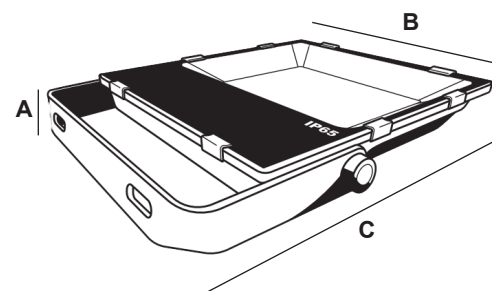

|        | 40L    | 60L    | 90L     | 120L    | 150L    |
|--------|--------|--------|---------|---------|---------|
| A      | 1.6"   | 1.9"   | 2.2"    | 2.4"    | 2.4"    |
| B      | 6.6"   | 8.7"   | 9.6"    | 11.6"   | 11.6"   |
| C      | 8.9"   | 12.2"  | 13.9"   | 15.8"   | 16.9"   |
| Weight | 6.6lbs | 7.7lbs | 11.0lbs | 15.4lbs | 16.5lbs |

LUMEN INFORMATION

|              | 3000K      | 4000K      | 5000K      |
|--------------|------------|------------|------------|
| FL21-CL-40L  | 4822 Lms   | 5160 Lms   | 5320 Lms   |
| FL21-CL-60L  | 7500 Lms   | 7740 Lms   | 7980 Lms   |
| FL21-CL-90L  | 10,297 Lms | 11,160 Lms | 11,520 Lms |
| FL21-CL-120L | 15,000 Lms | 15,480 Lms | 15,960 Lms |
| FL21-CL-150L | 18,000 Lms | 18,600 Lms | 19,200 Lms |