

## SPECIFICATIONS

OUTDOOR

### HOUSING

- Heavy duty die cast aluminum housing
- Powdercoat bronze finish

### ELECTRICAL

- Quad Tap (QT) - 120-277V
- 150,000 hours @ L<sub>70</sub>
- Dimmable driver standard
- Operating Temperature: -40°F (-40°C) - 150°F (65°C)
- Power factor: .99

### OPTICAL SYSTEM

- Glass lens
- CRI>80
- MCT: Selectable between 3000K/4000K/5000K

### MOUNTING

- Provided standard with trunnion bracket
- Knuckle mounting available 15W-60W

### CODE COMPLIANCE

- UL Listed for Wet Locations
- IP67 Rated
- DLC Premium Listed

### WARRANTY

- 5 Year



## FL22-CL LED Flood Light


## ORDERING INFORMATION

| MODEL # | Wattage     | Driver | CCT | Mount         |
|---------|-------------|--------|-----|---------------|
| FL22-CL | 15L (15W)   | QT     | 30K | SB (Trunnion) |
|         | 30L (30W)   |        | 40K | KN* (Knuckle) |
|         | 60L (60W)   |        | 50K |               |
|         | 90L (90W)   |        |     |               |
|         | 120L (120W) |        |     |               |
|         | 150L (150W) |        |     |               |

\*15L, 30L, and 60L models only

### OPTIONS (Factory Installed)

|      |                                                                      |
|------|----------------------------------------------------------------------|
| EM8  | - 8W Emergency Battery                                               |
| 480V | - 480V Driver (Replaces QT in part number)                           |
| OCS  | - Motion Sensor with Step-Down Capability and Dusk to Dawn Photocell |
| PC   | - Photocell                                                          |
| WH   | - White Housing (Bronze standard)                                    |

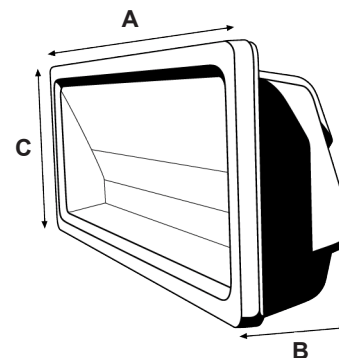

|        | 15W   | 30W   | 60W   | 90W    | 120W   | 150W   |
|--------|-------|-------|-------|--------|--------|--------|
| A      | 9.80" | 9.80" | 9.80" | 15.75" | 15.75" | 15.75" |
| B      | 3.75" | 3.75" | 3.75" | 3.75"  | 3.75"  | 3.75"  |
| C      | 6.25" | 6.25" | 6.25" | 6.25"  | 6.25"  | 6.25"  |
| Weight | 4bs   | 4lbs  | 4lbs  | 7lbs   | 7lbs   | 7lbs   |

LUMEN INFORMATION

|              | 3000K      | 4000K      | 5000K      |
|--------------|------------|------------|------------|
| FL22-CL-15L  | 2295 Lms   | 2385 Lms   | 2475 Lms   |
| FL22-CL-30L  | 4530 Lms   | 4710 Lms   | 4890 Lms   |
| FL22-CL-60L  | 9000 Lms   | 9360 Lms   | 9720 Lms   |
| FL22-CL-90L  | 13,860 Lms | 14,400 Lms | 14,940 Lms |
| FL22-CL-120L | 18,600 Lms | 19,320 Lms | 20,040 Lms |
| FL22-CL-150L | 22,500 Lms | 23,400 Lms | 24,300 Lms |