

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing
- Powdercoat bronze finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket

CODE COMPLIANCE

- UL Listed for Wet Locations
- IP67 Rated
- Meets DLC Requirements

WARRANTY

- 10 Year

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 480V driver optional
- Dimmable driver standard
- Operating Temperature: -40°F (-40°C) - 150°F (65°C)

OPTICAL SYSTEM

- Glass lens standard; polycarbonate lens available
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 200,000 Hours @ L₇₀
- CRI>80
- 5000K standard; 30K, 40K, and 57K also offered

MOUNTING

- Provided standard with trunnion bracket
- Knuckle mounting available 15W-60W

ORDERING INFORMATION


CATALOG #	Wattage	Lumens	Color
FL22-T-15L-QT-50K-SB	15W	2,475	5000K
FL22-T-15L-QT-50K-SB-HO	15W	2,688	5000K
FL22-T-30L-QT-50K-SB	30W	4,890	5000K
FL22-T-30L-QT-50K-SB-HO	30W	5,377	5000K
FL22-T-60L-QT-50K-SB	60W	9,720	5000K
FL22-T-60L-QT-50K-SB-HO	60W	10,753	5000K
FL22-T-90L-QT-50K-SB	90W	14,940	5000K
FL22-T-90L-QT-50K-SB-HO	90W	16,132	5000K
FL22-T-120L-QT-50K-SB	120W	20,040	5000K
FL22-T-120L-QT-50K-SB-HO	120W	21,054	5000K
FL22-T-150L-QT-50K-SB	150W	24,300	5000K
FL22-T-150L-QT-50K-SB-HO	150W	26,935	5000K

OPTIONS (Factory Installed)

30K	- 3000K (replaces 50K in part number)
40K	- 4000K (replaces 50K in part number)
57K	- 5700K (replaces 50K in part number)
KN	- Knuckle Mounting (replaces 'SB': 15W - 60W only)
EBLED	- Emergency Ballast
BLK	- Black Housing (bronze standard)
SIL	- Silver Housing (bronze standard)
GRY	- Gray Housing (bronze standard)
CC	- Custom Color (bronze standard)
480V	- 480V Driver
OCS	- Occupancy Sensor
PC	- Photocell
WPx	- Whip (x specify length)



FL22-T
LED Flood Light

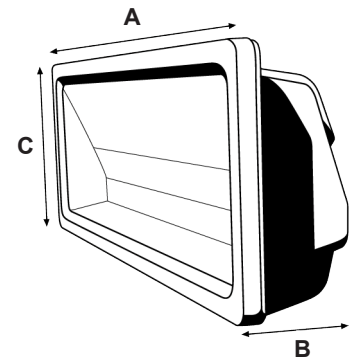

	15W	30W	60W	90W	120W	150W
A	9.80"	9.80"	9.80"	15.75"	15.75"	15.75"
B	3.75"	3.75"	3.75"	3.75"	3.75"	3.75"
C	6.25"	6.25"	6.25"	6.25"	6.25"	6.25"
Weight	4bs	4lbs	4lbs	7lbs	7lbs	7lbs