

SPECIFICATIONS

OUTDOOR

HOUSING

- Durable die-cast aluminum housing
- Anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching
- Available in bronze or white finishes
- Wiring cables included

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 0-10V Dimmable Driver Standard
- Operating temperature: -40°F - 113°F (-40°C - 45°C)
- Power factor > 0.9
- THD <15%
- 50,000 hours @ L₇₀

OPTICAL SYSTEM

- MCT: Selectable between 3000K/4000K/5000K
- CRI>80

MOUNTING

- Knuckle, trunnion, and yoke mount available
- Slip Fitter mount available for 2L model

CODE COMPLIANCE

- UL Listed for Wet Locations
- IP65 Rated
- DLC Premium Listed

WARRANTY

- 5 Year



FL26-S Color Selectable LED Flood Light

ORDERING INFORMATION


CATALOG#	Wattage	Lumens	CCT
FL26-S-1L-QT-MCT	15W/20W/35W	2100 / 2800 / 4900 Lms	30K/40K/50K
FL26-S-2L-QT-MCT	35W/60W/80W	4900 / 8400 / 11,200 Lms	30K/40K/50K
FL26-S-3L-QT-MCT	100W/120W/150W	13,000 / 15,600 / 19,500 Lms	30K/40K/50K

OPTIONS (Factory Installed)

PC - Photocell

ACCESSORIES (Order Separately)

- FL26-S-KM - Knuckle Mount (1L Model)
- FL26-S-SF - Slip-Fit Mount (2L Model)
- FL26-S-TM - Trunnion Mount (2L Model)
- FL26-S-YM1 - Yoke Mount (1L Model)
- FL26-S-YM2 - Yoke Mount (2L Model)

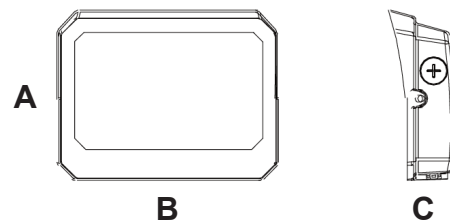

Model	A	B	C
1L	5.89"	6.93"	2.29"
2L	7.25"	9.49"	2.84"
3L	9.03"	11.85"	3.64"