

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing and hinged gasketed frame
- Bronze powdercoat bronze finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard
- 347V-480V also available
- Operating Temperature: -40°C (-40°F) - 50°C (122°F)

OPTICAL SYSTEM

- Clear glass lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 308,000 Hours @ L₇₀
- CRI: 80
- 4000K and 5000K available
- Type V: 110°H x 110°V NEMA 7H x 7V
- Type II: 27°H x 27°V NEMA 4H x 4V

ILLUMINATION

- 37.2W LED
- 41 System Watts
- ~175W HID

MOUNTING

- Adjustable knuckle with angle indicators and 1/2" NPS threads standard
- Ground stake and post top fitter also available

CODE COMPLIANCE

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP65 Rated
- Assembled in USA available
- Meets DLC Requirements*

WARRANTY

- 5 Year
- 10 Year Available

ORDERING INFORMATION

CATALOG #	Lumens	Distribution	Color
FL3-Q-37L-QT-40K-T5	3,721	Type V	4000K
FL3-Q-37L-QT-50K-T2	4,309	Type II	5000K
FL3-Q-37L-QT-50K-T5*	4,066	Type V	5000K

OPTIONS (Factory Installed)


SGP	-	Surge Protection
SGF	-	Single Fuse
DBF	-	Double Fuse
480V	-	347-480V Driver
10YR	-	10 Year Warranty
CC	-	Custom Color

ACCESSORIES (Ships on Side)


FL3-Q-GS	-	Glare Shield
FL3-Q-LG	-	Vandal Guard
FL3-Q-WG	-	Wire Guard
FL3-Q-STK	-	Ground Stake
FL3-Q-PTF	-	Post Top Fitter
For 2 3/8" - 3 1/2" Poles		




FL3-Q
Medium LED Flood Light

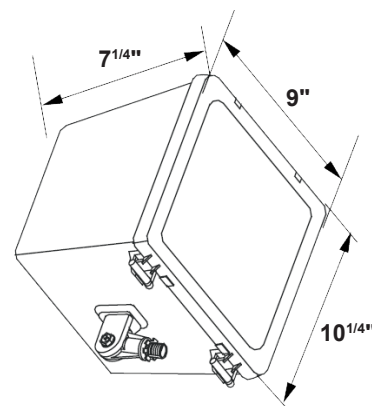

PHOTOMETRICS

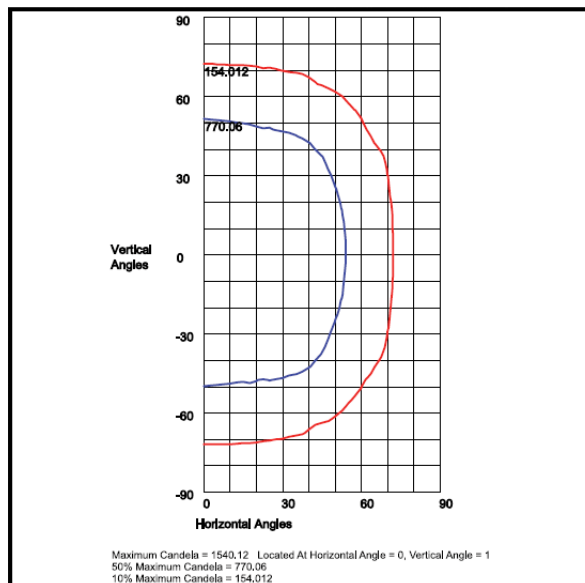

FL3-Q-37L-QT-50K-T5

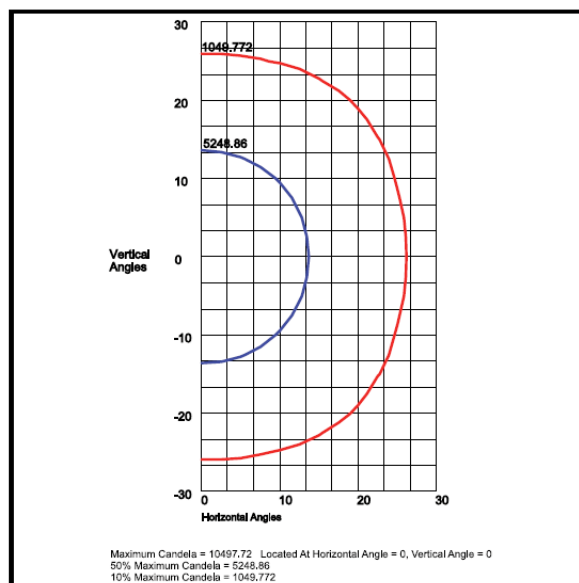

FL3-Q-37L-QT-50K-T3