

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing and hinged gasketed frame
- Bronze powdercoat bronze finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard
- 347V-480V also available
- Operating Temperature: -40°C (-40°F) - 50°C (122°F)

OPTICAL SYSTEM

- Clear glass lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 385,000 Hours @ L₇₀
- CRI: 80
- 4000K and 5000K available
- Type V: 110°H x 110°V NEMA 7H x 7V

ILLUMINATION

- 68.2W LED
- 75 System Watts
- ~400W HID

MOUNTING

- Mounts with slipfitter, yoke, or wall bracket

CODE COMPLIANCE

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP65 Rated
- Assembled in USA available
- Meets DLC Requirements

WARRANTY

- 5 Year
- 10 Year Available



FL4-Q Large LED Flood Light

ORDERING INFORMATION


CATALOG #	Lumens	Distribution	Color	Lens
FL4-Q-68L-QT-40K-CL	6,772	Type V	4000K	Clear
FL4-Q-68L-QT-40K-PL	6,433	Type V	4000K	Prismatic
FL4-Q-68L-QT-50K-CL	7,401	Type V	5000K	Clear
FL4-Q-68L-QT-50K-PL	7,031	Type V	5000K	Prismatic

OPTIONS (Factory Installed)


SF	-	Slipfitter
AY	-	Large Yoke
ST	-	Small Yoke
SGP	-	Surge Protection
SGF	-	Single Fuse
DBF	-	Double Fuse
480V	-	347-480V Driver
TWLPC3R	-	3-Pin Twist Lock Photocell Receptacle
TWL7PIN	-	7-Pin Twist Lock Photocell Receptacle
TWLPC1	-	110-120V Twist Lock Photocell
TWLPC2	-	105-287V Twist Lock Photocell
TWLTD1	-	120V Twist Lock Time Delay PC
TWLTD2	-	277V Twist Lock Time Delay PC
TWLNCS	-	Twist Lock Non-Shorting Cap (Fixture always off)
TWLSC	-	Twist Lock Non-Shorting Cap (Fixture always on)
10YR	-	10 Year Warranty
CC	-	Custom Color
USA	-	Made in USA

ACCESSORIES (Ships on Side)

FL4-Q-GS	-	Glare Shield
FL4-Q-LG	-	Vandal Guard
FL4-Q-WG	-	Wire Guard
FL4-Q-WB	-	Swivel Wall Bracket 120° Rotation

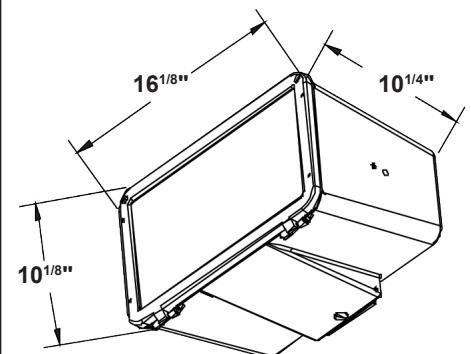

PHOTOMETRICS

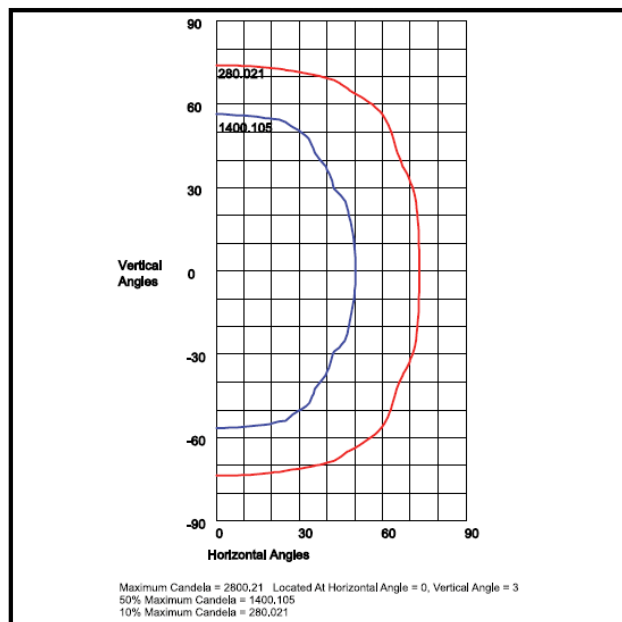

FL4-Q-68L-QT-50K-CL