

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing and hinged gasketed frame
- Bronze powdercoat bronze finish
- Corrosion resistant housing and hardware
- OxyShield 9-stage anti-oxidation process
- Silicone rubber gasket

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard
- 347V-480V also available
- Operating Temperature: -40°C (-40°F) - 50°C (122°F)

OPTICAL SYSTEM

- Clear glass lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 327,000 Hours @ L₇₀
- CRI: 80
- Available in 4000K and 5000K
- Type V: 110°H x 110°V NEMA 7H x 7V

ILLUMINATION

- 40.3W LED
- 44 System Watts
- ~175W HID

MOUNTING

- Adjustable knuckle with angle indicators and 1/2" NPS threads standard
- Slipfitter, ground stake, post top fitter also available

CODE COMPLIANCE

- CSA Listed for Wet Locations
- Meets UL Requirements
- IP65 Rated
- Assembled in USA available
- Meets DLC Requirements

WARRANTY

- 5 Year
- 10 Year Available

ORDERING INFORMATION

CATALOG #	Lumens	Distribution	Color
FL8-Q-40L-QT-40K-KN	4,064	Type V	4000K
FL8-Q-40L-QT-50K-KN	4,441	Type V	5000K

OPTIONS (Factory Installed)


SF	-	Slipfitter
SGP	-	Surge Protection
SGF	-	Single Fuse
DBF	-	Double Fuse
480V	-	347-480V Driver
10YR	-	10 Year Warranty
CC	-	Custom Color
USA	-	Assembled in USA

ACCESSORIES (Ships on Side)


FL8-Q-GS	-	Glare Shield
FL8-Q-LG	-	Vandal Guard
FL8-Q-WG	-	Wire Guard
FL8-Q-STK	-	Ground Stake
FL8-Q-PTF	-	Post Top Fitter
For 2 3/8" - 3 1/2" Poles		



FL8-Q
Round Back LED
Flood Light

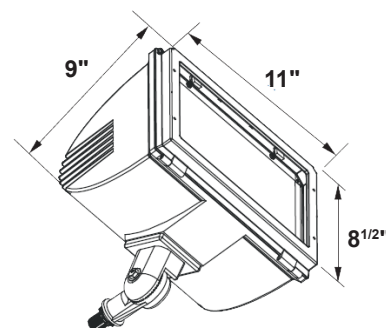

PHOTOMETRICS

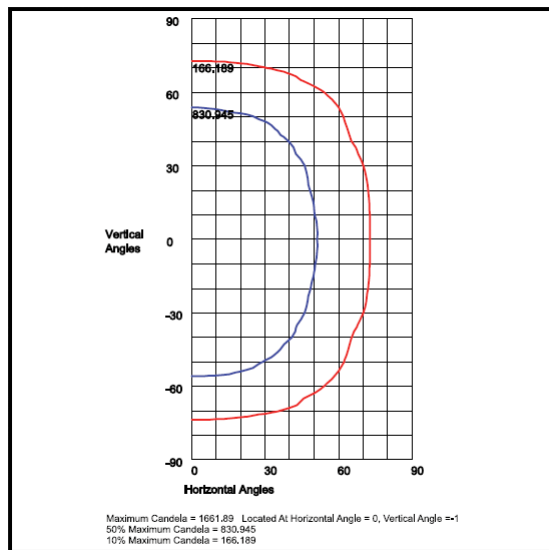

FL8-Q-40L-QT-50K