

SPECIFICATIONS

OUTDOOR

HOUSING

- Steel Housing
- Powdercoat light gray finish

MECHANICAL

- No wiring needed
- Operating Temperature: 14°F (-10°C) - 122°F (50°C)
- LiFePO4 Battery
- Battery charge time 6-10 hours (depending on sun quality)
- 10.5 Hours of operation on full charge
- Smart remote controller available

OPTICAL SYSTEM

- Type III Lens
- Available in 3000K and 5000K
- CRI>70
- 70,000 Hrs @ L₇₀

MOUNTING

- Slipfitter and trunnion mounts provided standard

CODE COMPLIANCE

- UL Listed for Wet Locations
- IP65 Rated

WARRANTY

- 5 Year



FLSOL1-W

Sensor Ready

Solar Flood Light


ORDERING INFORMATION

CATALOG#	LED Wattage	Solar Panel Wattage	Lumens
FLSOL1-W-30L-*	30W	60W	6,000 Lumens
FLSOL1-W-50L-*	50W	94W	10,000 Lumens
FLSOL1-W-70L-*	70W	112W	14,000 Lumens



*Specify 30K, 50K

ACCESSORIES (Order Separately)


FLSOL1-W-SF	Slip Fitter
FLSOL1-W-WB	Wall Bracket
FLSOL1-W-PM	Pole Mount
FLSOL1-W-REM	Remote Control (1 controls all)

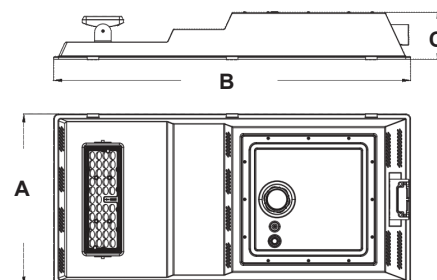

Model	A	B	C
30W	16.14"	33.86"	4.41"
50W	19.49"	43.50"	4.41"
70W	19.49"	43.65"	4.41"

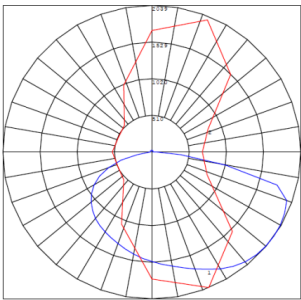
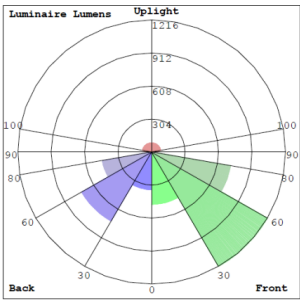


BUG Rating: B1-U2-G1

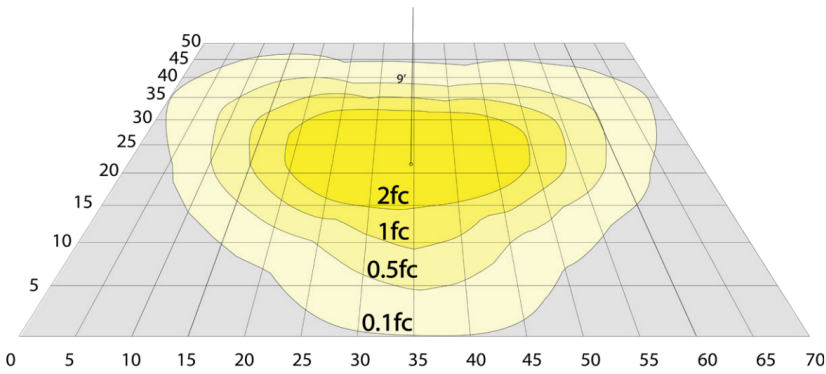


60W, 5000K Area 50'x 70' Mounting Height: 9'

FLSOL1-W-30L

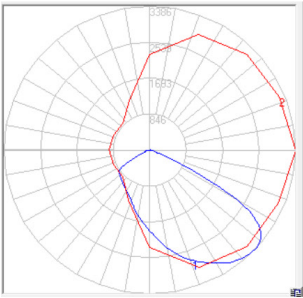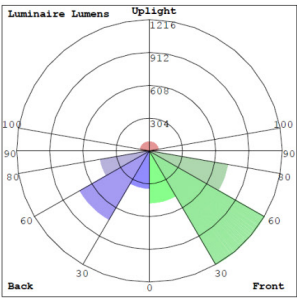


BUG Rating: B2-U2-G2

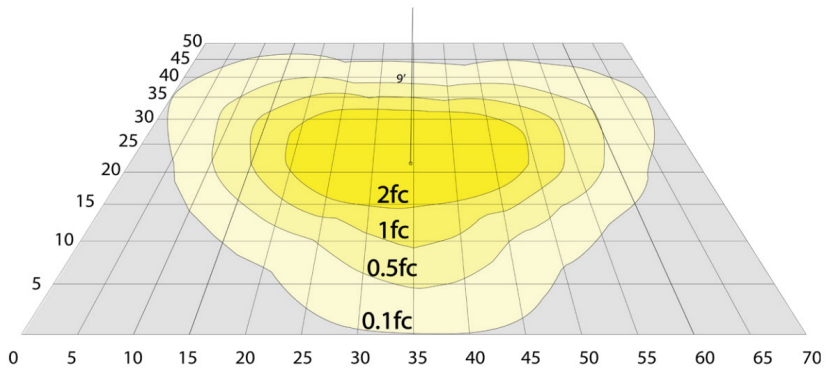


50W, 5000K Area 50'x 70' Mounting Height: 9'

FLSOL1-W-50L

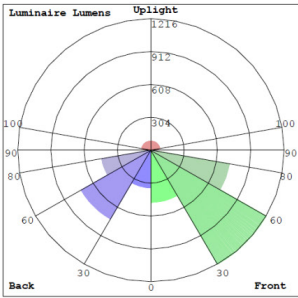

BUG Rating: B2-U2-G2

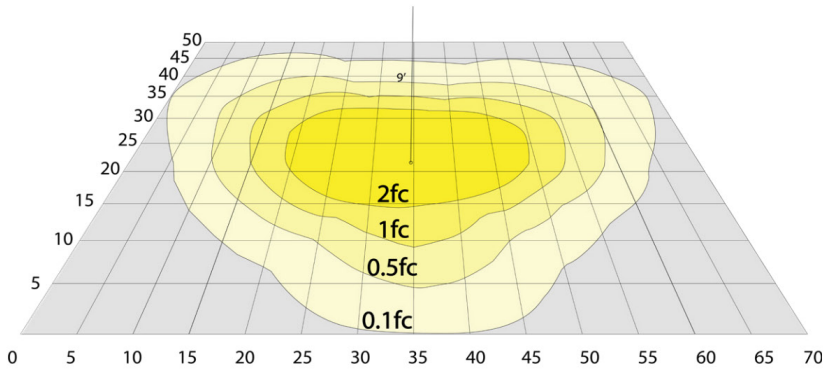

70W, 5000K Area 50'x 70' Mounting Height: 9'

FLSOL1-W-70L