

SPECIFICATIONS

OUTDOOR

HOUSING

- Heavy duty die cast aluminum housing
- Bronze powdercoat bronze finish
- Corrosion resistant housing and hardware
- Silicone rubber gasket
- Polycarbonate prismatic lens
- 1/2" coin plugs on sides and back

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard
- 347V-480V also available

OPTICAL SYSTEM

- Standard clear polycarbonate prismatic vandal-resistant lens
- Optional opal polycarbonate vandal-resistant lens
- Operating Temperature: -40°C (-40°F) - 40°C (104°F)
- CRI >80
- 50,000 hours
- Power Factor > .9
- THD < 20%
- Offered in 4000K and 5000K

ILLUMINATION

- 54W (62.3 system watts)
- ~250W HID

MOUNTING

- Built-in Template for Mounting to an Electrical Box
- 1/2" Surface conduit, downrod or Quick-mount bracket

CODE COMPLIANCE

- cSAs Listed for Wet Locations (Damp location when used with VRQM)
- Meets UL Requirements
- IP65 Rated Sealed LED Compartment
- Meets DLC Requirements
- Assembled in USA available

WARRANTY

- 5 Year
- 10 Year Available

ORDERING INFORMATION

CATALOG #	Lumens	Distribution	Color	Lens
GL1-Q-54L-QT-40K-PL	7,139	Type V	4000K	Prismatic
GL1-Q-54L-QT-40K-DL	6,996	Type V	4000K	Diffused
GL1-Q-54L-QT-50K-PL	7,436	Type V	5000K	Prismatic
GL1-Q-54L-QT-50K-DL	7,287	Type V	5000K	Diffused

OPTIONS (Factory Installed)


EBLED	-	Installed Emergency Ballast
WHT	-	White Housing
SGP	-	Surge Protection
SGF	-	Single Fuse
DBF	-	Double Fuse
480V	-	347-480V Driver
10YR	-	10 Year Warranty
CC	-	Custom Color
USA	-	Assembled in USA

ACCESSORIES (Ships on Side)


GL1-Q-VRQM	-	Hinged Quick-Mount Bracket
------------	---	----------------------------



GL1-Q-LED
LED Garage Light

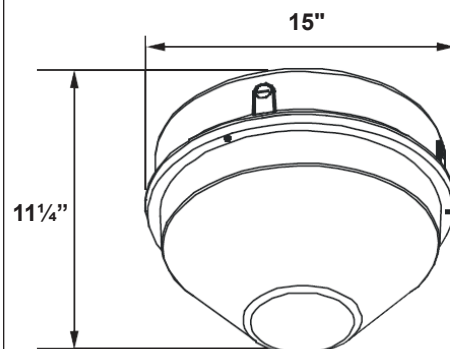

PHOTOMETRICS

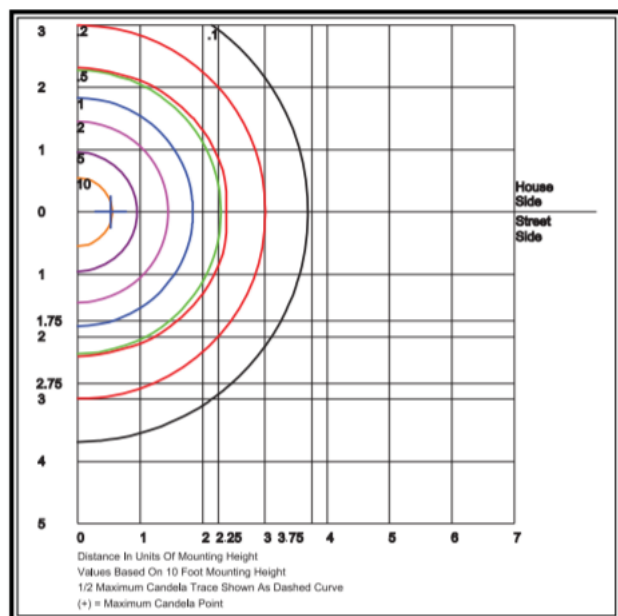

GL1-Q-54L-QT-50K-PL
Mounting Height = 10ft