

SPECIFICATIONS

OUTDOOR

HOUSING

- Diecast aluminum housing
- Available in bronze and white housing
- Easy installation in new or retrofit construction

ELECTRICAL

- Quad-Tap (120-277Vac)
- 0-10V Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 40°C (104°F)

OPTICAL SYSTEM

- Polycarbonate lens
- 3000K, 4000K, or 5000K
- CRI > 70
- THD < 20%
- Power Factor > 0.90

MOUNTING

- Surface mount fixture to 4" j-box

CODE COMPLIANCE

- cULus Listed for Wet Locations
- DLC Listed
- RoHS Compliant

WARRANTY

- 5 Year



GL13-C LED Wattage Selectable Canopy

ORDERING INFORMATION

CATALOG #	Wattage	Lumens**
GL13-C-1L-QT-*#	30W/50W/68W	8990 Lm
GL13-C-2L-QT-*#	65W/85W/108W	13036 Lm

*Specify Color Temp: **30K, 40K, 50K**

#Specify Housing: **WH-White, BZ-Bronze**

**Based on highest wattage 5000K


2L Model available on Special Order only

Options (Ships Installed)

- | | |
|------|-------------------------|
| OCS | - Occupancy Occupancy |
| EM8W | - 8W Emergency Driver |
| PC | - Photocell |
| SGP | - 10kV Surge Protection |



EM8W

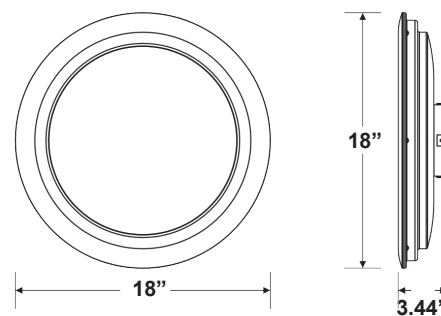

Quick mount system to a square / octagonal 4" surface or recessed j-box.

