

## SPECIFICATIONS

OUTDOOR

### HOUSING

- Heavy duty sealed die cast aluminum housing
- Corrosion resistant powder coat
- White finish standard, black and dark bronze also available

### ELECTRICAL

- Quad Tap (QT) - 120 - 277V
- 0-10V Dimmable driver standard (10-100%)
- Operating Temperature: -40°C (-40°F) - 45°C (113°F)
- THD < 20%
- Power Factor > 90%

### OPTICAL SYSTEM

- Polycarbonate lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 50,000 Hours @ L<sub>70</sub>
- CRI ≥ 80
- MCT: Switchable between 4000K and 5000K

### MOUNTING

- Mounting Bracket suitable for JBox mounting
- Supports pendant mounting

### CODE COMPLIANCE

- UL Listed for Wet Locations
- DLC Premium Listed

### WARRANTY

- 5 Year



1L



2L



## GL9-MS-MCT LED Selectable Canopy

## ORDERING INFORMATION

| CATALOG #        | Wattage         | Lumens                          | CCT     |
|------------------|-----------------|---------------------------------|---------|
| GL9-MS-1L-QT-MCT | 22W/34W/46W/60W | 3600 / 5000 / 6500 / 7700 Lms   | 40K/50K |
| GL9-MS-2L-QT-MCT | 32W/48W/64W/80W | 4480 / 6580 / 8510 / 10,400 Lms | 40K/50K |

### OPTIONS (Factory Installed)

|     |                                   |
|-----|-----------------------------------|
| OCS | - Plug-in Motion Sensor           |
| EM  | - Emergency Battery               |
| BK  | - Black Housing (white standard)  |
| BZ  | - Bronze Housing (white standard) |

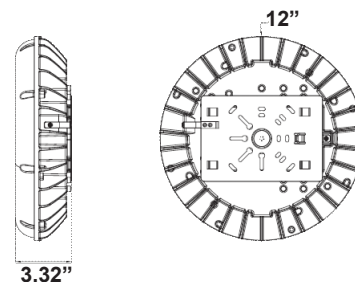

LUMEN INFORMATION

| Catalog # | Lumens  |         |         |         |         |         |           |           |
|-----------|---------|---------|---------|---------|---------|---------|-----------|-----------|
| GL9-MS-1L | 4000K   | 5000K   | 4000K   | 5000K   | 4000K   | 5000K   | 4000K     | 5000K     |
|           | 3600 Lm | 3500 Lm | 5000 Lm | 4900 Lm | 6500 Lm | 6300 Lm | 7700 Lm   | 7500 Lm   |
|           | 22W     | 22W     | 34W     | 34W     | 46W     | 46W     | 60W       | 60W       |
| GL9-MS-2L | 4000K   | 5000K   | 4000K   | 5000K   | 4000K   | 5000K   | 4000K     | 5000K     |
|           | 4480 Lm | 4320 Lm | 6580 Lm | 6350 Lm | 8510 Lm | 8200 Lm | 10,400 Lm | 10,000 Lm |
|           | 32W     | 32W     | 48W     | 48W     | 64W     | 64W     | 80W       | 80W       |

PHOTOMETRICS

