

SPECIFICATIONS

GROW LIGHTS

HOUSING

- Extruded aluminum housing
- Stainless steel hardware
- Standard 6' line cord with 120VAC plug
- IP65 Wet Location
- 5.5lbs

ELECTRICAL


- Quad Tap (120-277VAC)
- Operating Temperature: -20°C (-4°F) - 40°C (104°F)
- 41W Input

CODE COMPLIANCE


- UL Listed for Wet Locations
- IP66 Rated

WARRANTY

- 5 Year

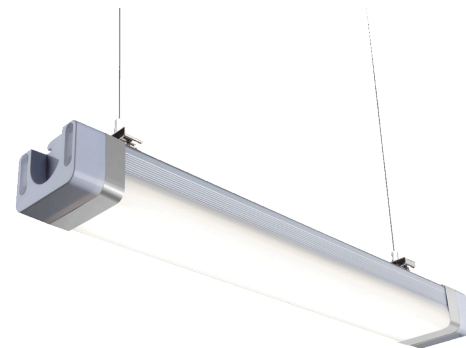

GLR-VT1 LED Vaportight Grow Light

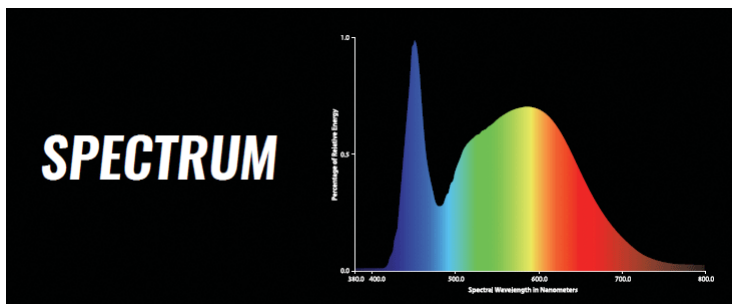

ORDERING INFORMATION

CATALOG #	Description
GLR-VT1-41L-QT	4W Grow Light Vaportight

