

SPECIFICATIONS

INDOOR

HOUSING

- 18 gauge die-formed steel
- Gasketed and sealed overlapping door
- Door hinges form either side
- Polyester powder-coat white finish
- Stainless steel door available
- Corrosion and scratch resistant
- Mounts recessed in ceiling with swing brackets
- 2 sizes available

ELECTRICAL

- Multiple voltages available

OPTICAL SYSTEM

- K12 .100 prismatic lens standard (multiple lenses available)

CODE COMPLIANCE

- UL Listed for Wet Locations
- IP65
- Suitable for use in ISO-3clean rooms (209E Class 1)

WARRANTY

- 5 Year



HART4-F

Clean Room Recessed Fluorescent Troffer


Model#	Width	#Lamps	Wattage/Size	Voltage	Ballast
HART4-F	1L (1',3 lamp max)	2	14W (24", T5)	120V	D (Dimming)
		3	17W (24", T8)	277V	EL (Electronic Instant Start)
		4	24W (24", T5HO)	QT	PR (Program Rapid Start)
	2L (2')	6	28W (48", T5)	347V	
			40W (24", T5)		
			32W (48", T8)		
			54W (48", T5HO)		

OPTIONS (ships installed)

AL125	- .125 Lens Acrylic (.100 Standard)
AL125G	- .125 Lens Acrylic with RFI Grid
PC125	- Polycarbonate .125Lens
PC156	- Polycarbonate .156 Lens
AH	- Aluminum Housing
SH	- Painted Stainless Steel Housing
SB	- Brushed Stainless Steel Housing
WH	- White door finish
BS	- Brushed Stainless Steel door finish
AL	- Aluminum Door
SS	- Stainless Steel door

ACCESSORIES (Order Separately)

2C	- Two circuit wired
CU	- Canadian UL Listing
EM1	- 1 Lamp Emergency Ballast
EM2	- 2 Lamp Emergency Ballast
FH	- Fuse and holder
RF	- Radio Interference filter, one per circuit
PF	- Plaster Frame
TP	- Stainless Steel Torx Head Fasteners w/pin
NL	- Night Light for 7W or 9W PL bipin
NL-LED	- LED Night light

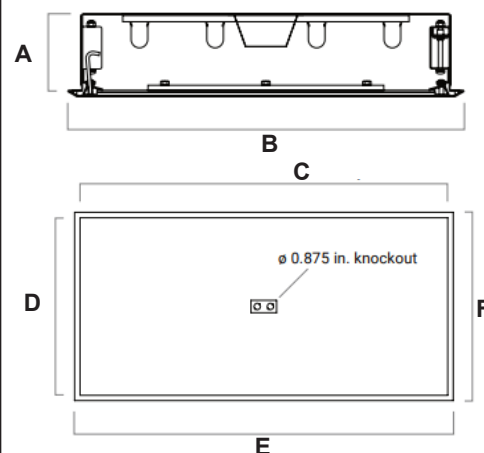

	A	B	C	D	E	F
1L	4.5"	12"	24"	10.4"	25.2"	11.5"
2L	4.5"	23.5"	48.1"	21.9"	49.3"	23"