

SPECIFICATIONS

HIGHBAYS

HOUSING

- Aluminum alloy housing
- Available in white or gray finishes
- Stainless steel screws
- Eye bolt

ELECTRICAL

- Quad Tap (QT): 120 - 277V
- 480V available
- 0-10V dimmable driver optional
- 50,000 hours @ L₇₀
- Max. Operating Temperature: 50°C (122°F)

OPTICAL SYSTEM

- Polycarbonate Lens
- CRI >80 standard
- Offered in 30K, 40K, and 50K

MOUNTING

- Mounting ring standard
- Surface mount bracket and 3/4" NPT adapter available

CODE COMPLIANCE

- cULus Listed for Wet Locations
- IP66 Rated
- DLC Premium Rated
- NSF Rated
- RoHS Compliant

WARRANTY

- 5 Year



HBFP2-F NSF Rated LED Highbay

ORDERING INFORMATION


MODEL#	Wattage / Lumens	Voltage	CCT	Housing
HBFP2-F	100AL (100W, 14,000 Lm)	QT (120-277V)	30K	WH (White)
	100BL (100W, 16,000 Lm)		40K	GY (Gray)
	120AL (120W, 16,800 Lm)		50K	
	120BL (120W, 19,200 Lm)			
	150AL (150W, 21,000 Lm)			
	150BL (150W, 24,000 Lm)			
	200AL (200W, 28,000 Lm)			
	200BL (200W, 32,000 Lm)			
	*Not available on 200BL models			

Options/Accessories on 2nd Page

OPTIONS / ACCESSORIES

OPTIONS (Factory Installed)


Controls	
DIM	- 0-10V Dimming
DALI	- Dali Control
MOCS	- Microwave Sensor
ZANTC	- Plug & Play Zigbee Controller with Antenna
Lens Options	
FPL120	- 120° Frosted Polycarbonate Lens (120° PCL standard)
PCL90	- 90° Clear Polycarbonate Lens (120° PCL standard)
AR	- Aluminum Reflector
CR	- Clear Reflector
LC	- Bottom Reflector Cover (for AR and CR)
Battery	
EM	- 25W Emergency Battery
Mounting	
SMB	- Surface Mount Bracket (Mountig Hook standard)
PMB	- 3/4" NPT Adapter (Mountig Hook standard)

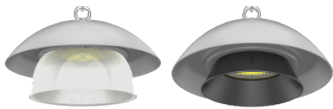


DIMENSIONS



Eye-bolt hook

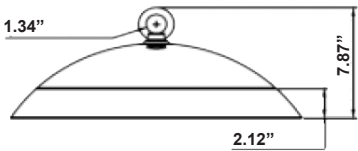

3/4" NPT Adapter
(conduit not included)

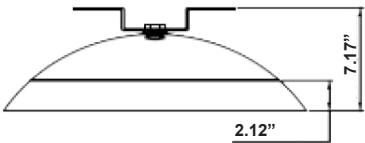

Surface Mount

