

## SPECIFICATIONS

## HIGHBAYS

### HOUSING

- Aluminum alloy housing
- Available in white or gray finishes

### ELECTRICAL

- Quad Tap (QT): 120 - 277V
- 480V available
- 0-10V dimmable driver optional
- Max. Operating Temperature: 50°C (122°F)

### OPTICAL SYSTEM

- Polycarbonat Lens
- CRI >80 standard
- Offered in 30K, 40K, and 50K

### MOUNTING

- Mounting ring standard
- Surface mount bracket and 3/4" NPT adapter available

### CODE COMPLIANCE

- cULus Listed for Wet Locations
- IP66 Rated
- DLC Premium Rated
- NSF Rated
- RoHS Compliant

### WARRANTY

- 5 Year



## HBFP2-F NSF Rated LED Highbay

## ORDERING INFORMATION


| MODEL#  | Wattage / Lumens               | Voltage       | CCT | Housing    |
|---------|--------------------------------|---------------|-----|------------|
| HBFP2-F | 100AL (100W, 14,000 Lm)        | QT (120-277V) | 30K | WH (White) |
|         | 100BL (100W, 16,000 Lm)        |               | 40K | GY (Gray)  |
|         | 120AL (120W, 16,800 Lm)        |               | 50K |            |
|         | 120BL (120W, 19,200 Lm)        |               |     |            |
|         | 150AL (150W, 21,000 Lm)        |               |     |            |
|         | 150BL (150W, 24,000 Lm)        |               |     |            |
|         | 200AL (200W, 28,000 Lm)        |               |     |            |
|         | 200BL (200W, 32,000 Lm)        |               |     |            |
|         | *Not available on 200BL models |               |     |            |

Options/Accessories on 2nd Page

OPTIONS / ACCESSORIES

OPTIONS (Factory Installed)


|                     |                                                       |
|---------------------|-------------------------------------------------------|
| <b>Controls</b>     |                                                       |
| DIM                 | - 0-10V Dimming                                       |
| DALI                | - Dali Control                                        |
| MOCS                | - Microwave Sensor                                    |
| ZANTC               | - Plug & Play Zigbee Controller with Antenna          |
| <b>Lens Options</b> |                                                       |
| FPL120              | - 120° Frosted Polycarbonate Lens (120° PCL standard) |
| PCL90               | - 90° Clear Polycarbonate Lens (120° PCL standard)    |
| AR                  | - Aluminum Reflector                                  |
| CR                  | - Clear Reflector                                     |
| LC                  | - Bottom Reflector Cover (for AR and CR)              |
| <b>Battery</b>      |                                                       |
| EM                  | - 25W Emergency Battery                               |
| <b>Mounting</b>     |                                                       |
| SMB                 | - Surface Mount Bracket (Mountig Hook standard)       |
| PMB                 | - 3/4" NPT Adapter (Mountig Hook standard)            |




DIMENSIONS



Eye-bolt hook

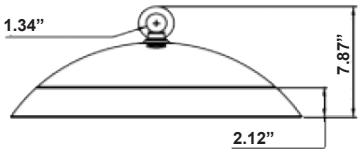

3/4" NPT Adapter  
(conduit not included)

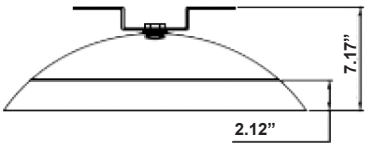

Surface Mount

