

SPECIFICATIONS

HIGHBAYS

HOUSING

- Die Cast aluminum housing
- Painted gray finish standard, white optional
- Stainless steel screws standard

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 480V available
- 0-10V dimmable driver optional
- Max Operating Temperature: 50°C (122°F)
- One Meter power cable standard

OPTICAL SYSTEM

- Polycarbonate lens standard
- 50,000 Hours @ L₇₀
- CRI: 70 standard, CRI 80 and CRI 90 also available
- 5000K standard, 3000K and 4000K available

MOUNTING

- Eye-bolt standard
- Pendant and surface mount also available

CODE COMPLIANCE

- cULus Listed for Wet Locations
- NSF Splash Zone Listed
- IP66
- IP69
- RoHS
- 1500psi Hosedown
- Meets DLC Requirements

WARRANTY

- 5 Year standard
- 10 Year available



HBFP2-F LED Food Processing Low Bay

ORDERING INFORMATION

MODEL#	DRIVER	COLOR TEMP	CRI	COLOR
HBFP2-F-100L (100W, 14,000 Lumens)	QT (120-277V)	30K	70C	WH
HBFP2-F-100LHO (100W, 16,000 Lumens)	480V	40K	80C	GR
HBFP2-F-120L (120W, 16,800 Lumens)		50K	90C	
HBFP2-F-120LHO (120W, 19,200 Lumens)				
HBFP2-F-150L (150W, 21,000 Lumens)				
HBFP2-F-150LHO (150W, 24,000 Lumens)				
HBFP2-F-200L (200W, 28,000 Lumens)				
HBFP2-F-200LHO (200W, 32,000 Lumens)				

OPTIONS (Ships Installed)**Lenses**

OPL120	-	120° Opal Polycarbonate Lens (clear standard)
TGL120	-	120° Tempered Glass Lens (clear standard)
CPL90	-	90° Clear Polycarbonate lens (120° clear standard)
CPL50	-	50° Clear Polycarbonate lens (120° clear standard)
CAC120	-	120° Clear Acrylic Lens

Controls

DIM	-	0-10V Dimming (non dimming standard; adds 3 wires on top)
MOCS	-	Microwave Sensor
DAL	-	Dali
ZWC	-	Zigbee Wireless Control

Mounting

NPT	-	3/4" NPT Adapter
SMB	-	Surface Mount Bracket

Accessories


EBLED	-	Emergency Battery Backup
CP#	-	Customer Length Power Cable (one meter standard)
SAF	-	2000mm Safety Chain (for eye bolt only)
PL	-	Plug
ALR	-	Aluminum Reflector
CLR	-	Clear Reflector
RLC	-	Bottom Reflector Cover for ALR/CLR

Warranty


10YR	-	10 year Warranty (5 year standard)
------	---	------------------------------------



Eye-bolt hook

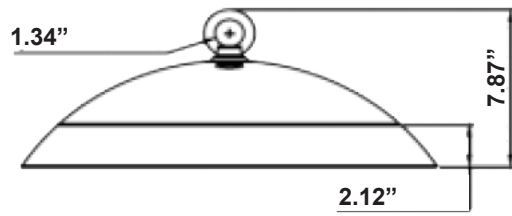

3/4" NPT Adapter
(conduit not included)

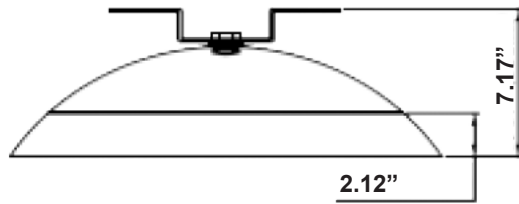

Surface Mount

