

SPECIFICATIONS

HIGHBAYS

HOUSING

- Die-cast aluminum housing
- Black finish housing

ELECTRICAL

- Quad Tap (QT) - 100-277V
- 1-10V Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 65°C (150°F)
- 150,000 hours @ L₇₀

OPTICAL SYSTEM

- Diffused tempered glass lens
- Available in 3000K, 4000K, 5000K
- CRI>80
- Philip LED Chips

MOUNTING

- Yoke mounting bracket standard on 320W models, optional for others
- Hook mount standard on 100W/50/240W models, supplied with 320W

CODE COMPLIANCE

- cULus Listed for Wet Locations
- IP67 Rated
- DLC Premium listed
- FCC Qualified
- RoHS Compliant

WARRANTY

- 5 Year



HBLED19-T LED Highbay

ORDERING INFORMATION


MODEL#	Wattage	Driver	CCT
HBLED19-T	100L (15,500 Lm)	QT	30K
	150L (24,000 Lm)		40K
	240L (38,000 Lm)		50K
	320L (52,000 Lm)		

OPTIONS (Factory Installed)

DL	-	Diffused Polycarbonate Lens (diffused tempered glass lens standard)
CL	-	Clear Polycarbonate Lens (diffused tempered glass lens standard)
OCSM	-	Occupancy Sensor
10YR	-	10 Year Warranty

ACCESSORIES (Ships on Side)

EM40-T	-	40W External Emergency Battery
HBLED-T-PA	-	Pendant Adapter
HBLED-T-YMS	-	Yoke Mounting Bracket (100W/150W Models)
HBLED-T-YML	-	Yoke Mounting Bracket (240W Models)

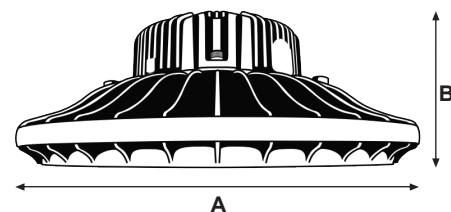

Model	A	B	Weight
100W	13.2"	6.7"	11.7 lbs
150W	13.2"	6.7"	12.6 lbs
240W	17.0"	6.7"	19.8 lbs
320W	17.0"	6.7"	21.6 lbs

LUMEN INFORMATION

Catalog #	100W			150W			240W			320W		
	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
HBLED19-T	15,320 Lm	15,900 Lm	16,300 Lm	23,560 Lm	24,168 Lm	24,776 Lm	37,200 Lm	38,160 Lm	39,120 Lm	51,818 Lm	52,480 Lm	54,440 Lm

MOUNTING

