

SPECIFICATIONS

HIGHBAYS

HOUSING

- Painted die-cast aluminum housing
- Black finish standard, also available in white and silver
- Smooth, screwless body

ELECTRICAL

- Quad Tap (QT): 120 - 277V
- 347-480V available
- 0-10V dimmable driver standard
- Operating Temperature: -40°C - 50°C (-40°F - 122°F)

OPTICAL SYSTEM

- Clear glass lens
- CRI >80 standard, CRI:70 available
- Offered in 30K, 40K, and 50K
- 120° Beam angle
- 143,000 Hours @ L₇₀

MOUNTING


- Can be hoke or yoke mounted

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- IP67 Rated
- IK10 Protection
- DLC Listed
- RoHS Compliant
- FCC Part 15, Class B Compliant
- CEC T24 Compliant

WARRANTY


- 5 Year

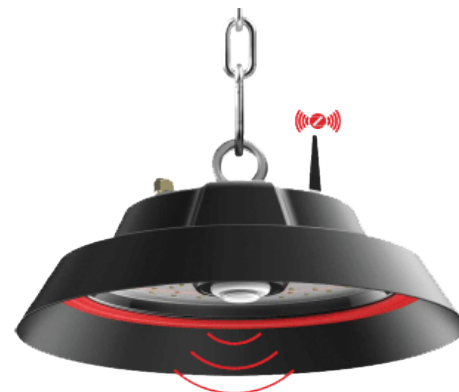

HBLED48-F Integrated Controls LED Highbay

ORDERING INFORMATION

MODEL#	Wattage / Lumens	Voltage	CCT	Color	CRI	Mounting
HBLED48-F	100AL (100W, 14,000 Lm)	QT (120-277V)	30K	BK (Black)	70C	CK (Chain & Hook)
	100BL (100W, 17,000 Lm)	480V (347-480V)	40K	WH (White)	80C	YM (Yoke)
	150AL (150W, 21,000 Lm)		50K	SL (Silver)		
	150BL (150W, 25,000 Lm)					
	190AL (190W, 25,200 Lm)					
	190BL (190W, 32,000 Lm)					

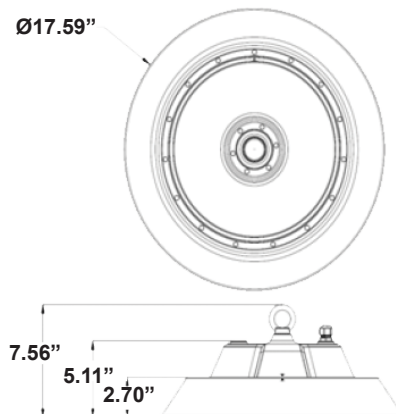

Options/Accessories on 2nd Page

OPTIONS / ACCESSORIES

OPTIONS (Factory Installed)

Controls

DALI	- Dali Control
PLC	- PLC Control
BLT	- Bluetooth Control
WIFI	- Wifi Control
ZANTC	- Plug & Play Zigbee Controller with Antenna

Individual Motion Sensors

OCSD	- Internal Daylight Sensor
MOCS	- Plug and Play Motion Sensor (remote controlled)

Lens Options

PR	- Polycarbonate Relector
DL	- Frosted Flat Lens

Cords

TWLCP1	- 120V 15A NEMA Twist Lock Plug
TWLCP2	- 277V 15A NEMA Twist Lock Plug
TWLCP3	- 120V 20A NEMA Twist Lock Plug
TWLCP4	- 277V 20A NEMA Twist Lock Plug
TWLCP5	- 480V 20A NEMA Twist Lock Plug

Surge Protection

SGP1	- 120-277V, 10KV Surge Protection
SGP2	- 120-277V, 20KV Surge Protection
SGP3	- 208-480V, 10KV Surge Protection
SGP4	- 208-480V, 20KV Surge Protection