

## SPECIFICATIONS

HIGHBAYS

### HOUSING

- Die Cast aluminum housing
- Easy installation
- Linkable: 150W (4 pcs), 100W (6 pcs), 60W (10 pcs)
- Cord and plug provided

### OPTICAL SYSTEM

- 360° Beam angle
- Available 3000K - 6500K
- CRI  $\geq 80$

### ELECTRICAL

- 120V
- Built-In LED Driver
- -40°C - 60°C (-40°F - 122°F)
- 4KV Surge protection
- 50,000 hours @ L<sub>70</sub>

### CODE COMPLIANCE


- cULus Listed
- RoHS Compliant
- IP64 Rated
- Suitable for enclosed fixtures

### WARRANTY

- 5 Year



## HBP3-LED LED Portable Highbay

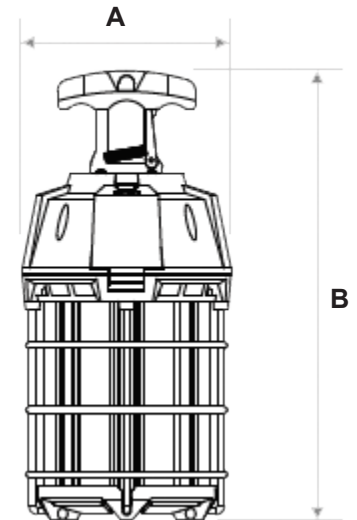

### ORDERING INFORMATION

CATALOG #	Wattage	Lumens
HBP3-60L-120V-*	60W	7,200 Lumens
HBP3-100L-120V-*	100W	12,000 Lumens
HBP3-150L-120V-*	150W	18,000 Lumens

\*Specify 30K, 35K, 40K, 50K, 65K

	A	B
60W	6.22"	10.67"
100W	6.22"	12.05"
150W	6.22"	13.43"