

SPECIFICATIONS

HAZARDOUS

HOUSING

- Copper-free die cast aluminum housing

ELECTRICAL

- Quad Tap (120/208/240/277VAC)
- 480V driver optional
- 0-10V Dimmable driver optional
- Operating Temperature: -40°F - 130°F (-40°C - 55°C): 20W-150W
- Operating Temperature: -40°F - 113°F (-40°C - 45°C): 200W/220W
- 10kV Surge Protection

OPTICAL SYSTEM

- Offered in 30K - 60K
- Available in multiple optics
- CRI_≥70
- 85,000 @ L₇₀

MOUNTING

- Surface mounting and pendant mounting

CODE COMPLIANCE

- Class I, Div I, Groups C, D
- Class I, Div II, Groups A, B, C, D
- Class II, Div I, Groups E, F, G
- Class II, Div II, Groups F, G
- Class III
- UL1598 Listed
- IP66 Rated
- BAA Optional

WARRANTY

- 5 Year

CATALOG#	Wattage/Lumens	Voltage	Color	Lens	Optic (degrees)
HLFL4-F	20L (2,500 Lumens)	QT	30K	GL (Glass)	40D
	40L (5,100 Lumens)	480V	40K	PL (Polycarbonate)	60D
	60L (7,600 Lumens)		50K		90D
	80L (10,200 Lumens)		60K		120D
	100L (12,800 Lumens)				
	150L (19,200 Lumens)				
	200L (25,600 Lumens)				
	220L (28,500 Lumens)				

Lumen values shown at 4000K

OPTIONS (Factory Installed)

DIM	- 0-10V Dimmable Driver
EBLED	- Integral Battery Backup
OCS	- Occupancy Sensor
USA	- Buy American Compliant
TAA	- Trade Agreements Act Compliant

ACCESSORIES (Order Separately, Ships on Side)

HLFL4-F-JBOX	- Junction Box
HLFL4-F-CSM	- Ceiling/Surface Mount with JBox: 3/4" NPT
HLFL4-F-WM90	- 90° Wall Mount
HLFL4-F-WMJB90	- 90° Wall Mount with JBox: 3/4" NPT
HLFL4-F-WMJB25	- 25° Wall Mount with JBox: 3/4" NPT
HLFL4-F-PM90	- 90° Pole Mount: 1 1/2" NPT
HLFL4-F-PM25	- 25° Pole Mount: 1 1/2" NPT
HLFL4-F-SFA	- Slip Fitter to Yoke Adapter




HLFL4-F-SFA




HLFL4-F Hazardous Location Flood Light


20W-80W

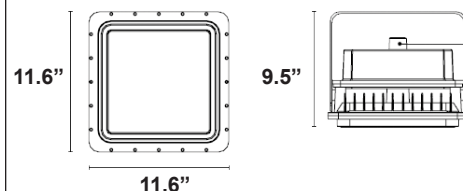


100W-220W

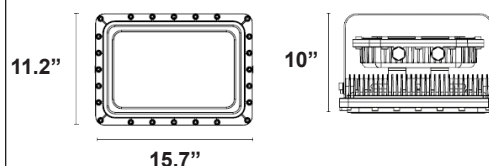


JBOX




WMJ25




WMJ90

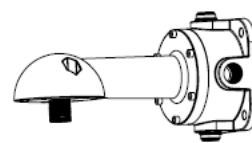

WM90



PM25

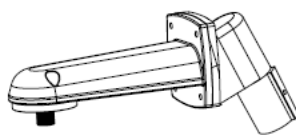

PM90

