VersaLED Lighting
Versatile Lighting Solutions

Project

Type

Catalog Number

SPECIFICATIONS — HAZARDOUS

HOUSING
- Die cast aluminum, corrosion resistant housing
- Silicon rubber gasket, stainless steel hardware

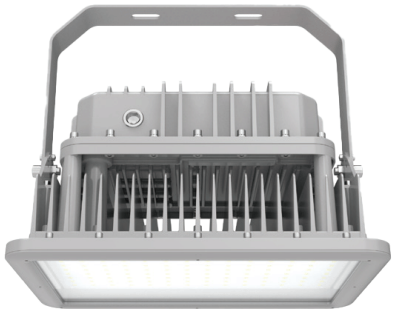
ELECTRICAL
- Quad Tap (120-277VAC)
- 277-480V also available
- 1-10V Dimmable driver
- Power factor > .95

OPTICAL SYSTEM
- Clear flat glass lens
- MCT: Selectable between 4000K/5000K/6500K
- Beam angle: 120°
- CRI≥80
- 100,000 @ L_{70}

MOUNTING
- Ceiling mount and wall mount included, pendant mount available

CODE COMPLIANCE
- UL 844 Hazardous Locations Class
- Class I Div II Group A, B, C, D
- UL1598 Wet Locations
- UL1598A Marine Type
- ABS
- Vibration 3G
- IP66 Rated
- NEMA 4X
- IK10

WARRANTY
- 5 Year



HLFL4.5-F
Hazardous Location Flood Light

CATALOG#	Wattage/Lumens	Voltage	Color
HLFL4.5-F	**1L** (40W/60W/80W) (6064 - 11,980 Lms)	**QT**	**MCT**(40K/50K/65K)
	2L (80W/100W/150W) (14,454 - 25,919 Lms)	**480V**	
	3L (120W/150W/200W) (21,066 - 34,107 Lms)		
	4L (200W/250W/300W) (37,198 - 54,772 Lms)		
	350L (350W) (64,750 Lms)		
	400L (400W) (74,000 Lms)		
	500L (500W) (92,500 Lms)		
	550L (550W) (101,750 Lms)		

OPTIONS (Factory Installed)

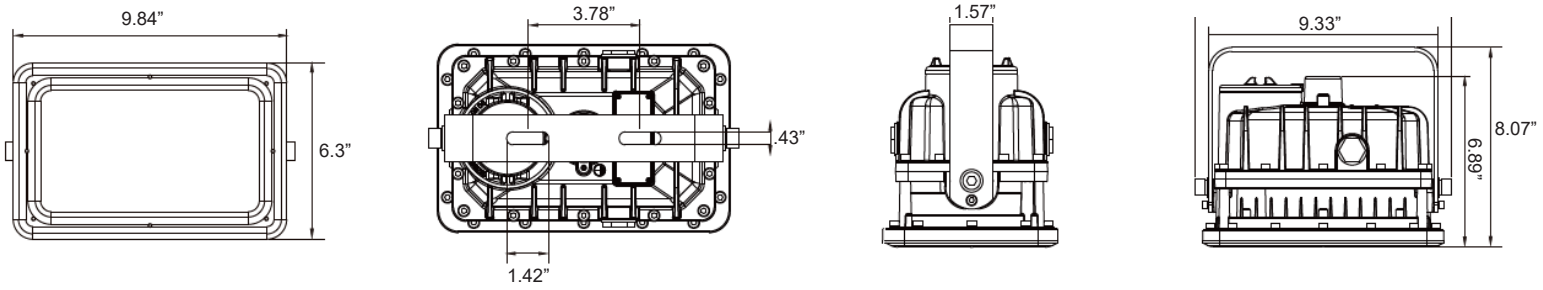
EM	-	Integral Battery Backup

ACCESSORIES (Order Separately, Ships on Side)

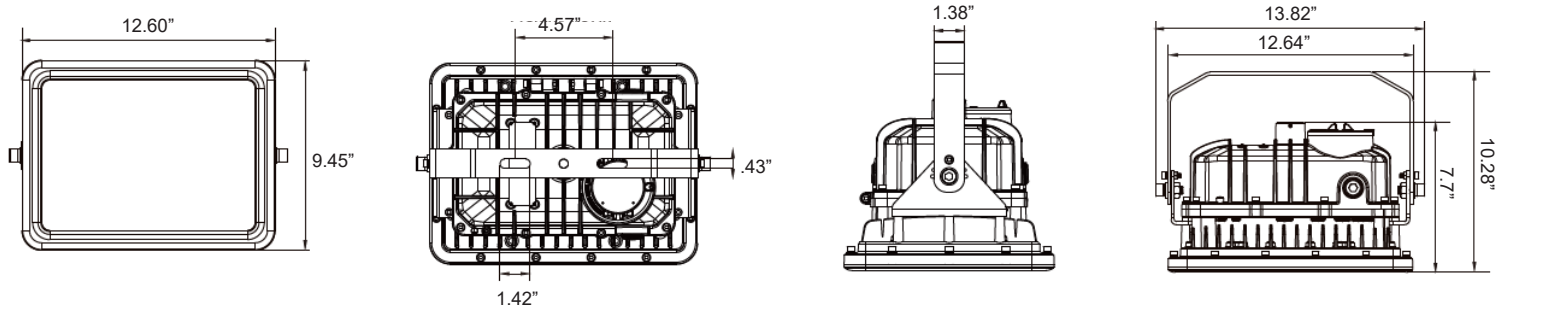
HLFL4-F-JBOX	-	Junction Box
HLFL4-F-CSM	-	Ceiling/Surface Mount with JBox: 3/4" NPT
HLFL4-F-WM90	-	90° Wall Mount
HLFL4-F-WMJB90	-	90° Wall Mount with JBox: 3/4" NPT
HLFL4-F-WMJB25	-	25° Wall Mount with JBox: 3/4" NPT
HLFL4-F-PM90	-	90° Pole Mount: 1 1/2" NPT
HLFL4-F-PM25	-	25° Pole Mount: 1 1/2" NPT
HLFL4-F-SFA	-	Slip Fitter to Yoke Adapter

Dimensions shown on 2nd page

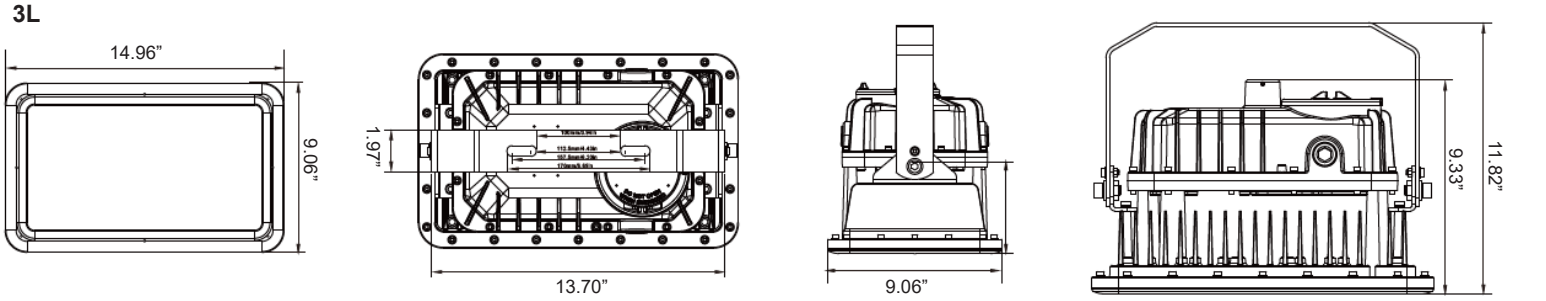
1L


9.84”
6.3”
3.78”
.43”
1.42”
1.57”
10.43”
9.33”
8.07”
6.89”

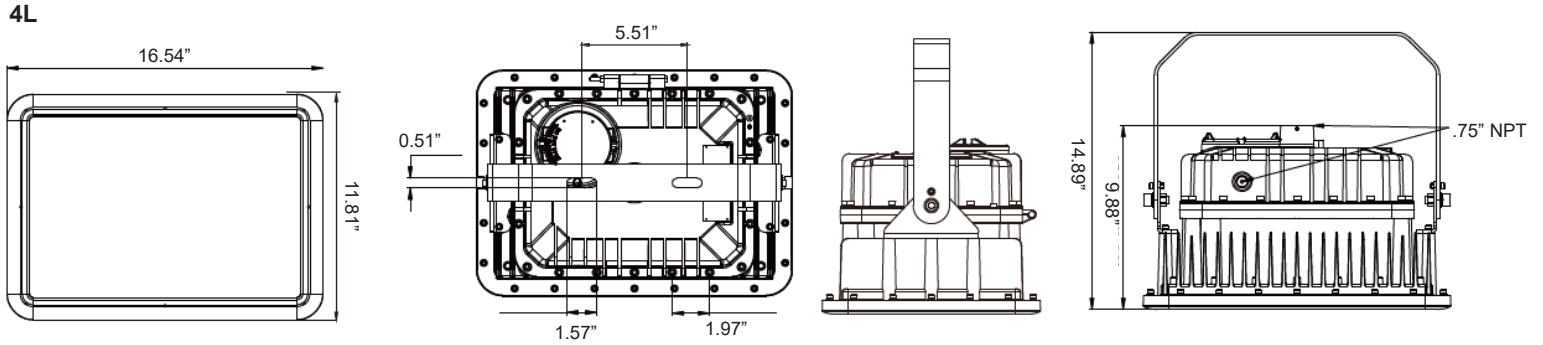
2L


12.60”
9.45”
4.57”
.43”
1.42”
1.38”
13.82”
12.64”
10.28”
7.7”

3L


14.96”
9.06”
1.97”
13.70”
9.06”
11.82”
9.33”

4L


16.54”
11.81”
5.51”
0.51”
1.57”
1.97”
14.89”
9.88”
.75” NPT