

SPECIFICATIONS

HAZARDOUS

HOUSING

- Copper-Free Cast Aluminum Housing
- Gray painted finish
- Standard 2" Cable out of 3/4" threaded hub on top

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- 347-480V Optional
- 0-10V Dimming Optional
- Operating Temperature: -40°C (-40°F) - 55°C (130°F)
- 150,000 Hours @ L₇₀

OPTICAL SYSTEM

- Impact resistant clear or ribbed lenses available
- IC current controlled LED circuits
- CRI > 70
- 4000K, 5000K, 6000K available

MOUNTING

- Surface and Pendant Mounting standard with bracket
- Multiple mounting options available

CODE COMPLIANCE

- UL 1598 Listed for Listed for Wet Locations
- UL 844 Listed for Hazardous Locations
- CSA Listed
- Class I, Div I, Groups C & D
- Class I, Div II, Groups A, B, C, & D
- Class II, Div I & II, Groups E, F, & G
- Class III
- IP66 Rated
- DLC Listed

WARRANTY

- 5 Year Warranty
- 10 Year Warranty optional



HLLB2-F LED Hazardous Location LowBay


CATALOG #	Wattage	Lumens
HLLB2-F-40L-QT-#	40W	5,600 Lumens
HLLB2-F-60L-QT-#	60W	8,400 Lumens
HLLB2-F-80L-QT-#	80W	11,200 Lumens
HLLB2-F-100L-QT-#	100W	14,000 Lumens
HLLB2-F-150L-QT-#	150W	21,000 Lumens
HLLB2-F-200L-QT-#	200W	28,000 Lumens
HLLB2-F-250L-QT-#	250W	35,000 Lumens
HLLB2-F-280L-QT-#	280W	39,200 Lumens
*Specify Color Temp: 40K , 50K , 60K		
#Specify Optics (Degrees): 40D ; 60D ; 90D ; 120D		

OPTIONS (Factory Installed)

480V	- 347-480V Driver
DIM	- 0-10V Dimming
EM	- Battery Backup (100W-250W models)
10YR	- 10 Year Warranty
BAA	- Buy American Compliant
TAA	- Trade Agreements Act

ACCESSORIES (Order Separately, Ships on Side)

HLLB2-F-FGG	- Frosted Globe and Guard
HLLB2-F-CGG	- Clear Globe and Guard
HLLB2-F-WG	- Wireguard
HLLB2-F-DREFL	- Dome Reflector (used with FGG)
HLLB2-F-AREFL	- Angled Reflector (used with FGG)
HLLB2-F-PSM90	- 90° Pole Stanchion Mount
HLLB2-F-PSM25	- 25° Pole Stanchion Mount
HLLB2-F-WM90	- 90° Wall Mount
HLLB2-F-WM25	- 25° Wall Mount
HLLB2-F-JBOX	- JBox

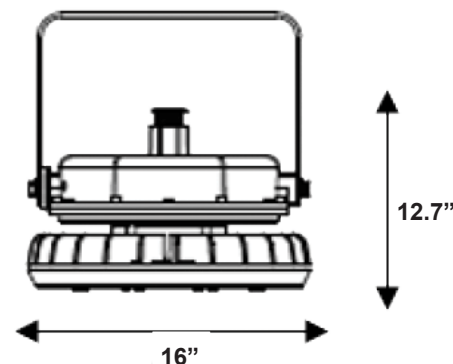

Mounting Options

