

SPECIFICATIONS

HAZARDOUS

HOUSING

- Copper-free aluminum alloy housing
- Anti-corrosion powder coated finish
- Four conduit holes

ELECTRICAL

- Quad Tap (QT) - 120-277V
- 277-480V Optional
- 1-10V Dimmable
- Operating Temperature: -40°C (-40°F) - 65°C (149°F)
- Power factor >.90

OPTICAL SYSTEM

- 120° beam angle
- CRI > 70
- 3000K, 4000K, 5000K available
- Also available in Red, Green, Blue, Amber Color Temps

MOUNTING


- Pendant, ceiling, 25° stanchion, trunnion, or wall mount

CODE COMPLIANCE

- UL1598, UL 1598A, UL8750, UL844 Listed
- cSA Listed
- Class I, Div I, Groups B, C, & D
- Class I, Div II, Groups A, B, C, & D
- Class II, Div I, Groups E, F, & G
- Class II, Div II, Groups F & G
- Class III
- IP66 Rated
- IK10
- NEMA4X Rated
- Wildlife Friendly (when using AMBER light)

WARRANTY

- 5 Year Warranty
- 10 Year Optional

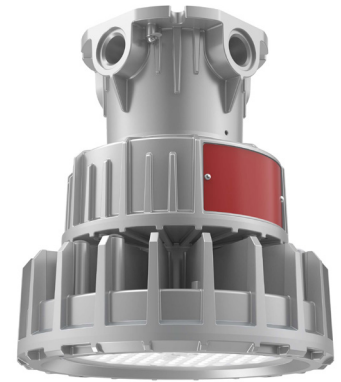

HLLB4-F
LED Hazardous Location
LowBay / Area Light

MODEL#	Wattage	Driver	Color	Mounting
HLLB4-F	30L (4200 Lm)	QT (120-277V)	30K	CM (Ceiling)
	40L (5600 Lm)	480V (277-480V)	40K	TM (Trunion)
	50L (7000 Lm)		50K	PM (Pendant)
	60L (8400 Lm)		RD (Red)	WM (Wall)
	70L (9800 Lm)		GN (Green)	PSM25 (25° Stanchion)
			BL (Blue)	
			AM (Amber)	


Options (Factory Installed)

- 10YR - 10 Year Warranty

Accessories (Order Separately, Ships on Side)

- HLLB4-F-WG1 - Wireguard
- HLLB4-F-NPT - 3/4" NPT

DIMENSIONS

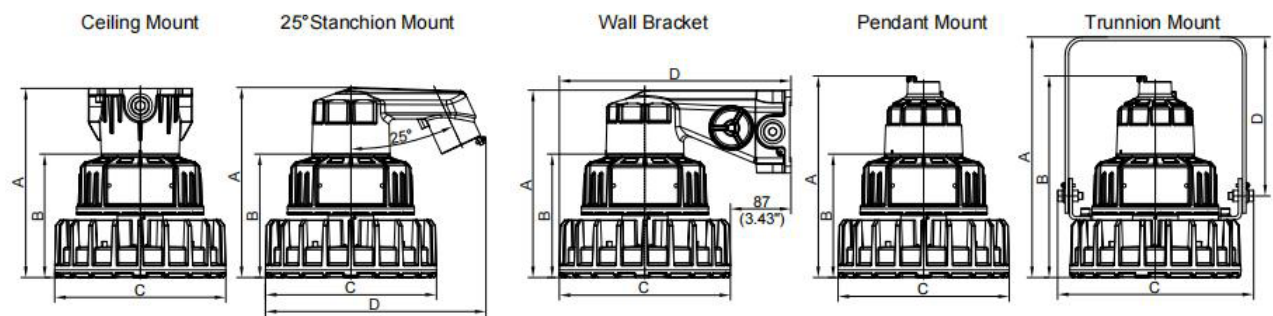

Dimensions In/mm																		
Unit	Ceiling Mount			25° Stanchion Mount				Wall Bracket				Pendant Mount			Trunnion Mount			
	A	B	C	A	B	C	D	A	B	C	D	A	B	C	A	B	C	D
Inch	10.8	7.0	9.8	10.8	7.0	9.8	12.6	10.7	7.0	9.8	13.2	11.5	7.0	9.8	13.7	11.5	11.2	9.1
mm	274	179	248	275	179	248	320	271	179	248	336	292	179	248	348	292	284	230

MOUNTING



PHOTOMETRICS

