

SPECIFICATIONS

HARSH ENVIRONMENT

HOUSING

- Aluminum alloy with powder-coat finish
- Stainless steel

ELECTRICAL

- QT (120-277V)
- 200-480V
- 0-10V Dimmable driver standard
- Operating temperature: -40°C - 60°C (-40°F - 140°F)
- Built-in power supply

OPTICAL SYSTEM

- Polycarbonate lens
- MCT (3500K/4000K/5000K/5700K)
- Beam angle: 120°
- 100,000 Hours @ L₇₀

MOUNTING

- Pendant (standard), recessed, or ceiling mount

CODE COMPLIANCE

- Class I Div II, Groups A, B, C, D
- UL Listed for Wet Locations
- UL 844 and UL 924 listed
- IP66
- IK10

WARRANTY

- 5 Year



HLRT1-F


Hazardous Location Recessed LED Light

ORDERING INFORMATION

MODEL#	Size/Wattage	Driver	CCT	Mounting
HLRT1-F	1x2 (40W, 5200 lumens)	QT	3500K	RM (Recessed Mount)
	1x4 (40/60W, 5200-7800 lumens)	480V	4000K	PM (Pendant Mount)
	2x2 (40/60/80W, 5200-10400 lumens)		5000K	CM (Ceiling Mount)
	2x4 (60/80/100/120/150/200W, 7800-26000 lumens)		5700K	

Dimensions on 2nd Page

DIMENSIONS

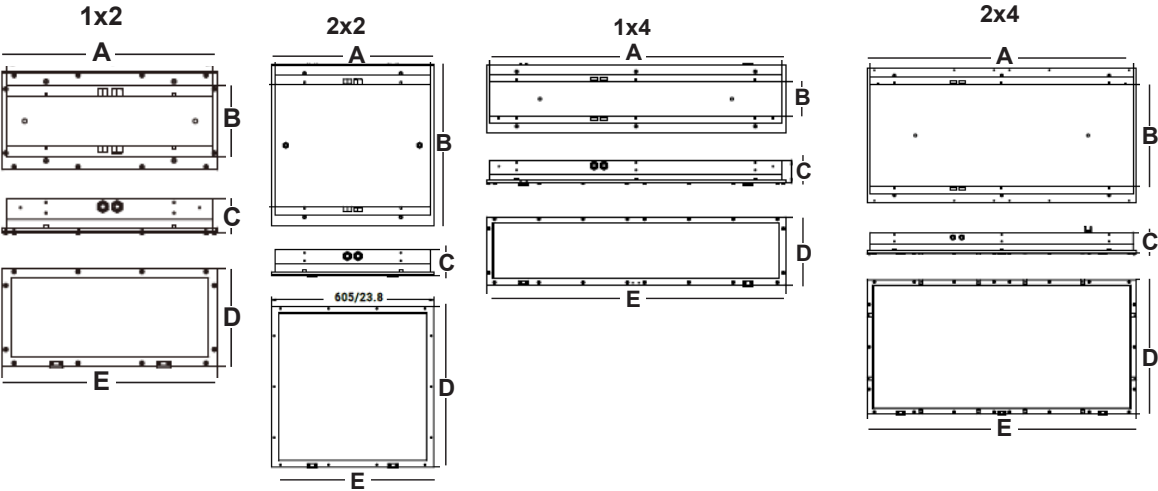

	A	B	C	D	E
1x2	18.8"	14.7"	3.7"	10.8"	23.8"
1x4	30.7"	14.7"	3.7"	10.8"	47.8"
2x2	19.6"	31.6"	3.7"	23.8"	23.8"
2x4	30.7"	27.7"	3.7"	23.8"	47.8"