VersaLED Lighting
Versatile Lighting Solutions

Project

Type

Catalog Number

SPECIFICATIONS HAZARDOUS

HOUSING
- Heavy duty aluminum housing
- Gray painted finish

ELECTRICAL
- Quad Tap (QT) - 120-277V or 480V
- Operating Temperature: -40°C (-40°F) - 45°C (113°F)
- Power factor>.90
- 50,000 hours @ L_{70}

OPTICAL SYSTEM
- Polycarbonate lens
- CRI > 70
- 4000K or 5000K

MOUNTING
- Pendant, Surface, Wall, and Pole Mounting options available

CODE COMPLIANCE
- cULus Listed for Wet Locations
- Class I, Div II, Groups A, B, C, & D
- Class II, Div I, Groups E, F & G
- Class II, Div II, Groups F & G
- Class III
- IP66 Rated
- IK10
- BAA Compliant optional
- TAA Compliant optional

WARRANTY
- 5 year warranty
- 10 year warranty optional




HLVT3-F
LED Hazardous Location Fixture

CATALOG #	Wattage	Driver	CCT
HLVT3-F	**2X20L** (2800 Lms)	**QT**	**40K**
	2X30L (4200 Lms)	**480V**	**50K**
	2X40L (5600 Lms)		
	4X40L (5600 Lms)		
	4X50L (7000 Lms)		
	4X60L (8400 Lms)		


OPTIONS (Factory Installed)	
DIM	- 0-10V Dimming
OCS	- Occupancy Sensor
SSH	- 316 Stainless Steel Hardware
BAA	- Buy American Act Compliant
TAA	- Trade Agreements Act Compliant
PM	- Pendant Mount
SM	- Surface Mount
WM	- Wall Mount
PLM	- Pole Mount
10YR	- 10 year warranty

DIMENSIONS


2’

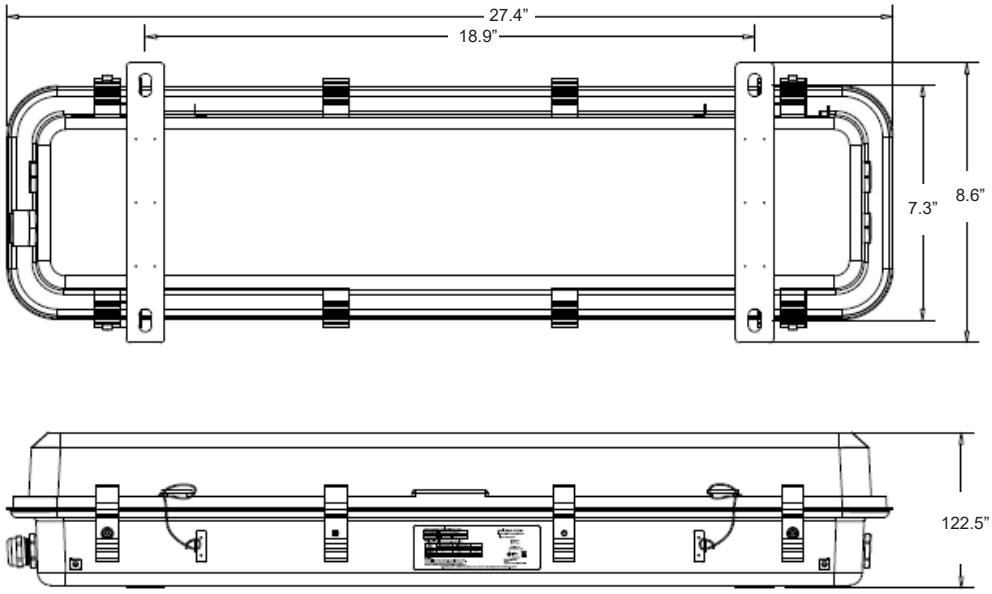


4’

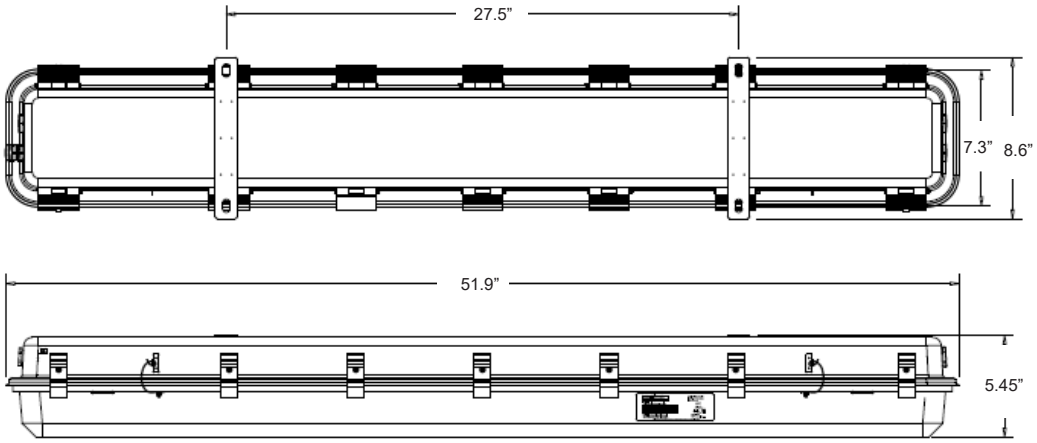


MOUNTING

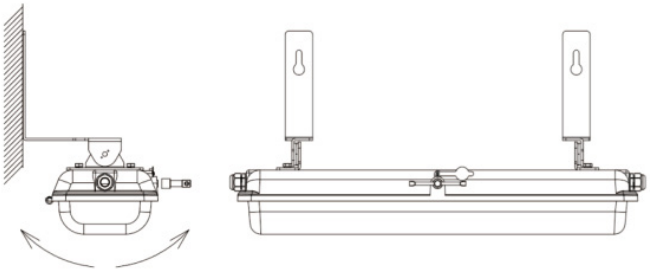


Wall Mount

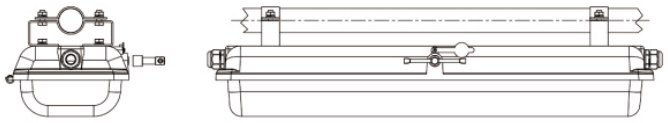

Pole Mount

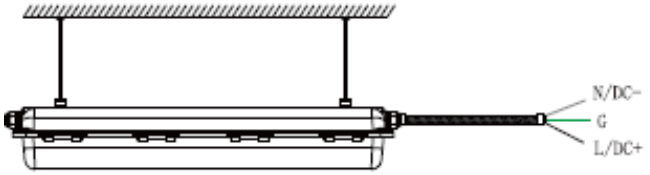

Pendant Mount

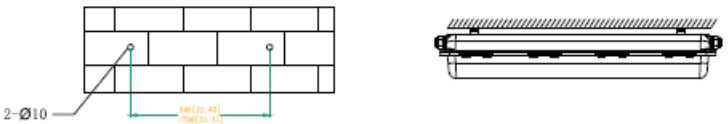

Surface Mount