

SPECIFICATIONS

OUTDOOR

HOUSING

- Die cast aluminum housing
- Powdercoat black or verde green housing available
- Corrosion resistant housing and hardware
- OxyShield multi-stage anti-oxidation process
- Silicone rubber gasket

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Operating Temperature: -20°C (-4°F) - 40°C (104°F)

OPTICAL SYSTEM

- Clear, heat resistant, Polycarbonate Lens
- IC current controlled LED circuits
- Available in 4000K
- 30° and 60° Beams offered

MOUNTING



- Threaded pipe (NPS 1/2") which attaches to a junction box is standard
- Ground stake optional for ground mounting

WARRANTY

- 5 Year



LD2-DM LED Landscape Flood

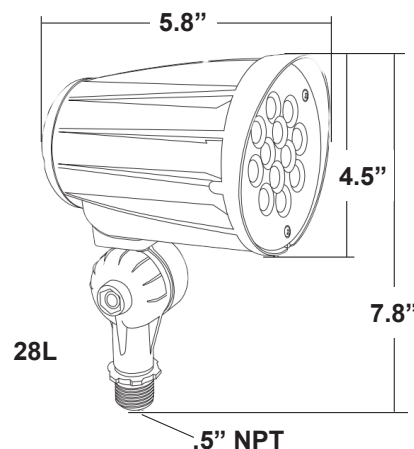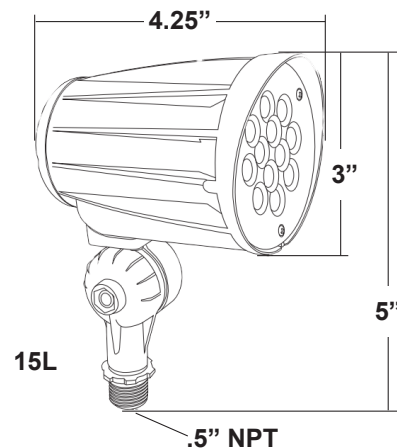

ORDERING INFORMATION

MODEL#	Wattage	Driver	CCT	Beam Spread	Color
LD2-DM	15L (15W, 1650 Lms)	QT	40K	30D	BK (Black)
	28L (28W, 3000 Lms)			60D	GR (Verde Green)



STK

ACCESSORIES (Order Separately, Ships on Side)

LD2-DM-STK - Ground Stake