

SPECIFICATIONS

OUTDOOR

HOUSING

- Extruded aluminum round housing
- Flush mount easy-hang wall bracket
- Internal heat sinking and driver compartment
- Bronze or black powdercoat finish

ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V
- Dimmable driver standard
- Operating Temperature: -40°C (-40°F) - 50°C (122°F)

OPTICAL SYSTEM

- Clear glass lens
- High quality heat sinks for temperature control
- IC current controlled LED circuits
- 89,000 Hours @ L₇₀
- CRI: 80
- 4100K

ILLUMINATION

- 20W LED
- 21 System Watts
- ~100W HID

MOUNTING

- Cast-In template for mounting directly over a 4" recessed outlet box

CODE COMPLIANCE

- cSAus Listed for Wet Locations
- Meets UL Requirements
- IP66 Rated
- Wildlife Lighting Certified - Cert #2018-001
- Turtle-Safe

WARRANTY


- 5 Year
- 10 Year Available

ORDERING INFORMATION

CATALOG #	DISTRIBUTION	
OC1-CB-20L-QT-A-AMB	Medium - 70° Reflector	4100K
OC1-CB-20L-QT-B-AMB	Wide - 100° Reflector	4100K
OC1-CB-20L-QT-C-AMB	Narrow - 30° Reflector	4100K

OPTIONS (Factory Installed)

AS	-	Angled Shade <u>(Required for Wildlife Certification)</u>
EBLED	-	Integral Battery Backup
BLK	-	Black Housing (bronze standard)
PC1	-	120V Photocell
PC3	-	120-277V Photocell
SGP	-	Surge Protection
SGF	-	Single Fuse
DBF	-	Double Fuse
CC	-	Custom Color
10YR	-	10 Year Warranty

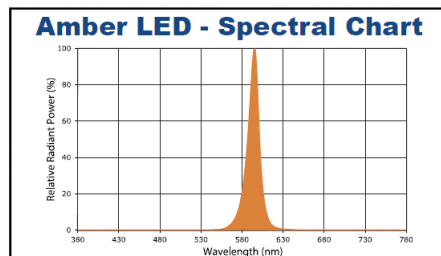

OC1-CB-AMB Amber LED Cylinder

